



Skylite® 1x2


FLUORESCENT ASYMMETRIC

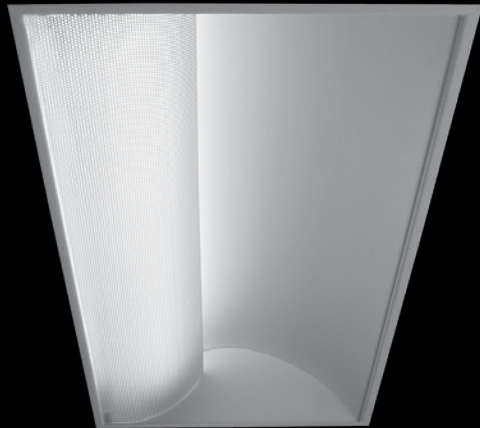


DIMENSIONAL DATA

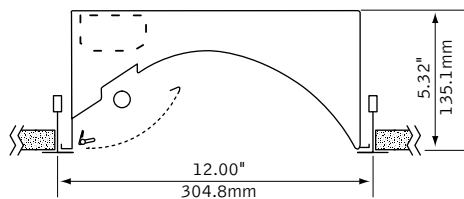

lamping options



T8 LAMPS



T5/T5HO LAMPS

FEATURES

1' x 2' recessed asymmetric indirect with perforated side basket.


High reflectance, low gloss Matte White finish controls glare.

Perforated lamp shield swings down for easy relamping.

All luminaire combinations may be continuously row mounted.

Asymmetric distribution illuminates corridors, conference rooms or any area where high angle vertical illumination is desired.

PERFORMANCE



PRODUCT OVERVIEW

Lumen Output: 761-2707lm
Wattage: 16-51W
Lamping: T5, T5HO, T8




1-Lamp T5HO
56% Efficient
478 cd @ 25°

Visit focalpointlights.com for complete photometric data.

fixture:

project:

MOUNTING INFORMATION

<p>grid</p> <p>specify "G" for flat 9/16" and 15/16" tee or "ST" for 9/16" slot tee grid types.</p>  <p>"G" flat tee Luminaires cannot be installed in T-bar ceiling systems over 1.5" high in T8 lamp configurations.</p>	<p>drywall frame kit</p> <p>specify "F" Drywall Frame Kit for drywall ceiling conditions.</p>  <p>Use tie-wire or screws to secure frame kit.</p>	 <p>cut out dimensions: 1': Min: 12.25" Max: 12.563" 2': Min: 24.25" Max: 24.563"</p>
--	---	--

SPECIFICATIONS

Construction

One-piece 20 Ga. steel reflector and housing. 22 Ga. perforated shields with white acrylic lens insert. Shield is secured by spring latches that allow for easy relamping. Unit weight: 12 lbs.

Optic

One-piece 20 Ga. steel reflector finished in Matte Satin White powder coat.

Electrical

Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available. Consult factory for dimming specifications and availability.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a 5-stage pre-treatment.

ORDERING

Luminaire Series	FBX
Skylite	FBX
Nominal Size	12
1' x 2'	12
Distribution	W
Asymmetric	W
Lamp Quantity	
One Lamp	1
Two Lamp	2
Lamp Type	
T8	T8
T5	T5
T5HO	T5HO
Ballast	
Electronic Program Start <10% THD	S
0-10V	D7
Lutron 1% 3-wire	DH
Lutron 1% H-Series	DK
Voltage	
120 Volt	120
277 Volt	277
347 Volt	347
<small>(Consult factory for dimming options)</small>	
120/277 Volt	UNV
<small>(Cannot be specified with 1-lamp T5HO dimming or EM option)</small>	
Mounting	
Drywall Frame Kit	F
<small>(Cut out dimensions: Min: 12.25"/Max: 12.563" Min: 24.25"/Max 24.563")</small>	
Grid	G
Slot Tee	ST
Shielding	PS
Perforated Shield	PS
Factory Options	
Air Return	AR
Chicago Plenum	CP
Dust Cover	DC
Emergency Battery Pack*	EM
Positional Clip	EQ
HLR/GLR Fuse	FU
6' New York City Flex Whip	FNY
6' Flex Whip	FW
Include 3000K Lamp*	L830
Include 3500K Lamp*	L835
Include 4100K Lamp*	L841
Separate Circuit*	SC
Finish	WH
Matte White	WH