



id+ 4.5" Adjustable Accent BEAMSPREAD GUIDE


30° AIMING ANGLE BEAM PATTERNS

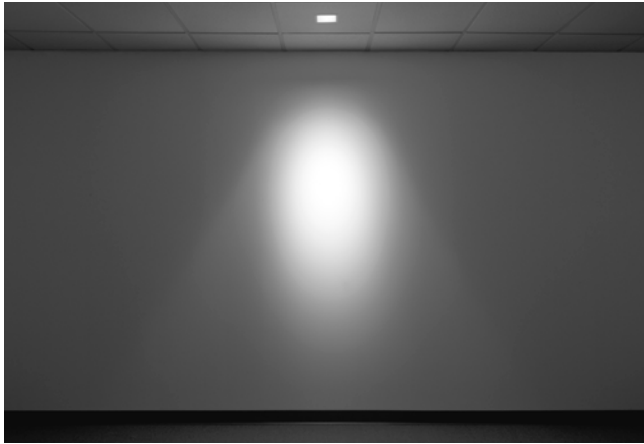

Spot (SP)
Clear Diffuse Reflector (CD)

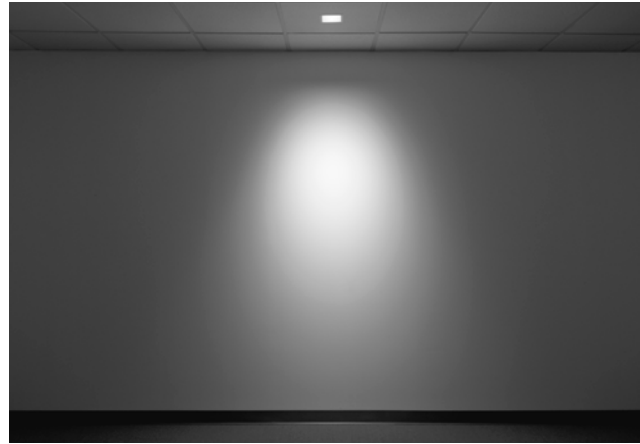

Narrow Flood (NFL)
Clear Diffuse Reflector (CD)

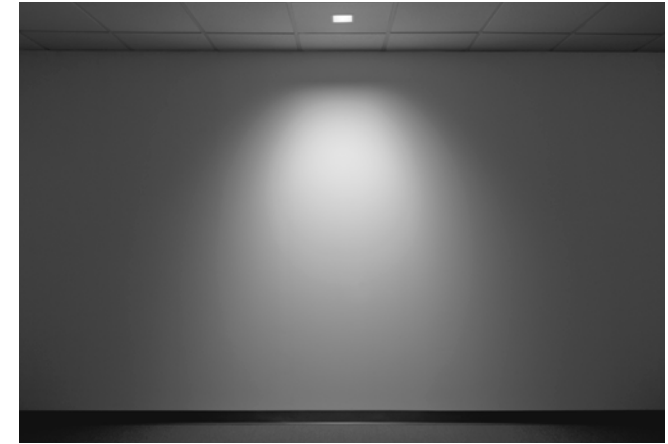

Flood (FL)
Clear Diffuse Reflector (CD)

PERFORMANCE CHART - ADJUSTABLE ACCENT AT 30°

Rated Lumen Output	Distribution	Delivered Lumens	System Watts	Beamspread	Center Beam Candlepower (CBCP)
1000 Lumens	Spot	750	16	10°	9,000
	Narrow Flood	600	16	25°	3,000
	Flood	500	16	40°	1,000
1500 Lumens	Spot	950	25	10°	10,400
	Narrow Flood	800	25	25°	2,700
	Flood	700	25	40°	1000
2000 Lumens	Spot	1,400	36	10°	17,300
	Narrow Flood	1,100	36	25°	4,500
	Flood	1,100	36	40°	1,600
2500 Lumens	Spot	1,800	42	10°	18,000
	Narrow Flood	1,400	42	25°	6,400
	Flood	1,200	42	40°	2,500

*Lumen output may vary +/- 5%. 3500K Color Temperature.