



perforated



slotted




solid



suspended companion

DIMENSIONAL DATA

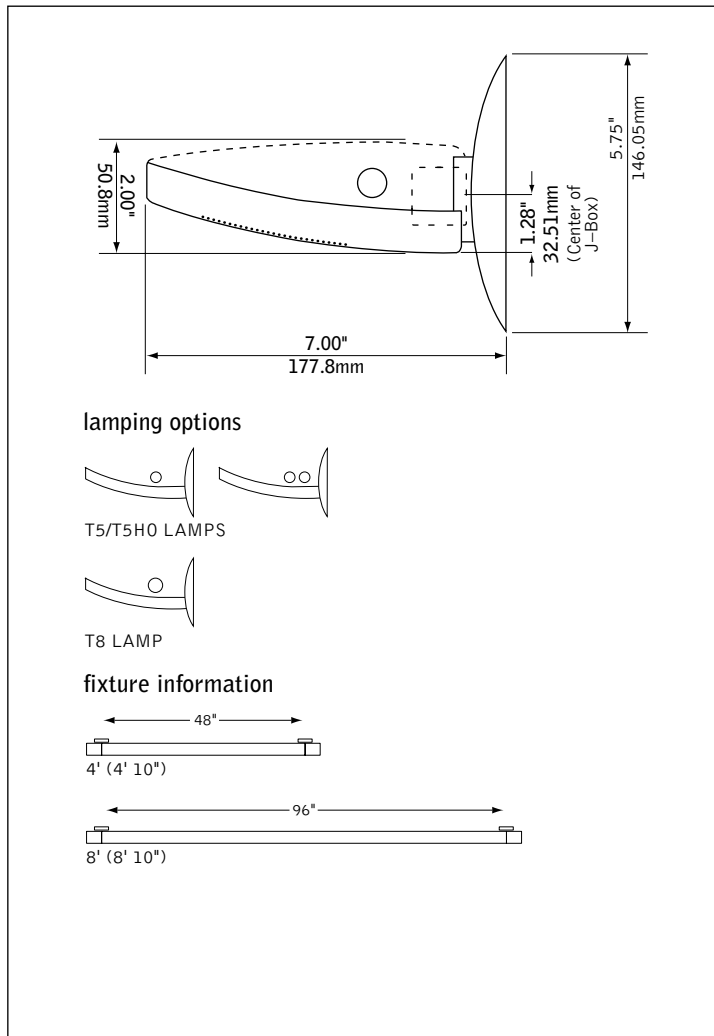

FEATURES


Wall mounted indirect asymmetric fluorescent with contoured housing and end caps.

Elegant wall-mount version of Focal Point's suspended Verve™ II.

One-piece steel housing with 5" die-cast end caps.

Verve™ is an excellent choice for any open or private office.


PERFORMANCE

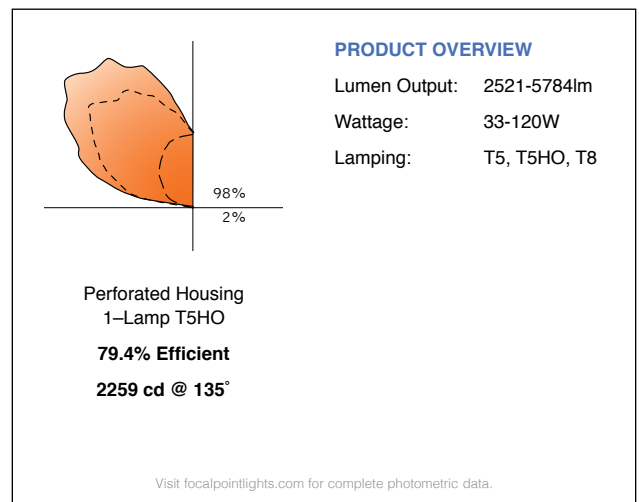

fixture:

project:

MOUNTING INFORMATION

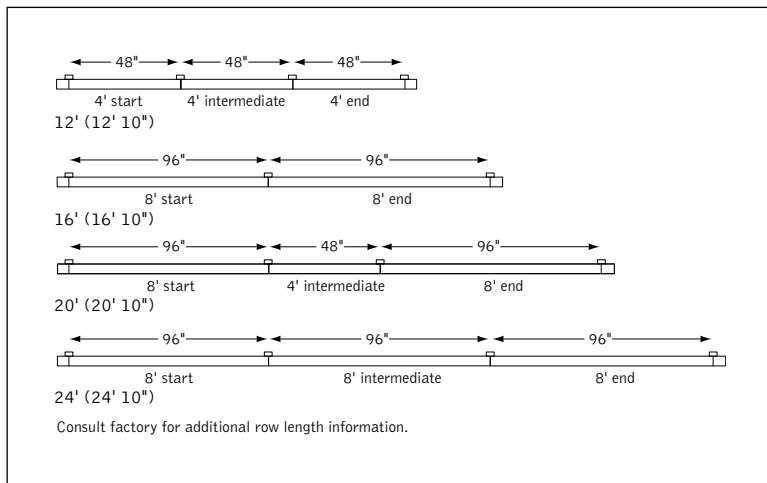

SPECIFICATIONS

Construction

One-piece 20 Ga. steel housing available solid or with perforated or slotted pattern. Perforated or slotted housing includes white acrylic insert. Die-cast 5" end cap fastened to housing. For row installation, internal brackets form hairline joint. Standard lengths are available in 4' and 8'. All luminaires are provided with mounting brackets. 4' unit weight: 15 lbs., 8' unit weight: 22 lbs.

Optic

Die-formed 24 Ga. steel reflector, finished in high reflectance white powder coat (93% min. reflectance).

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available.

Labels

UL and cUL listed.

Finish


Polyester powder coat applied over a 5-stage pretreatment. Mounting arm and brackets finished to match housing.

ORDERING

		<u>FV2W</u>
Fixture Series	Verve II	FV2W
Shielding		
Perforated Housing	PS	
Slotted Housing	SL	
Solid Housing	SD	
Lamping		
1 Lamp T5	1T5	
1 Lamp T5HO	1T5HO	
2 Lamp T5	2T5	
2 Lamp T5HO	2T5HO	
1 Lamp T8	1T8	
Circuit		
Single Circuit	1C	
Dual Circuit	2C	
<small>(Multiple lamp luminaires only)</small>		
Voltage		
120 Volt	120	
277 Volt	277	
347 Volt	347	
<small>(Consult factory for dimming options)</small>		
120/277 UNV	UNV	
<small>(Not available with 1-lamp T5HO dimming or EM)</small>		
Ballast		
Electronic Program Start <10% THD	S	
0-10V	D7	
Lutron 1% 3-wire	DH	
Lutron 1% H-Series	DK	
Mounting		<u>WM</u>
Wall Mount	WM	
Factory Options		
Dust Cover	DC	
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
HLR/GLR Fuse	FU	
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
<small>(Sensor options available—consult factory)</small>		
Finish		
Matte White Housing	WH	
Titanium Silver	TS	
Luminaire Length		
4'	4'	
8'	8'	
12'	12'	
16' (8'+8')	16'	
20' (12'+8')	20'	
24' (12'+12')	24'	



CANDLEPOWER DISTRIBUTION

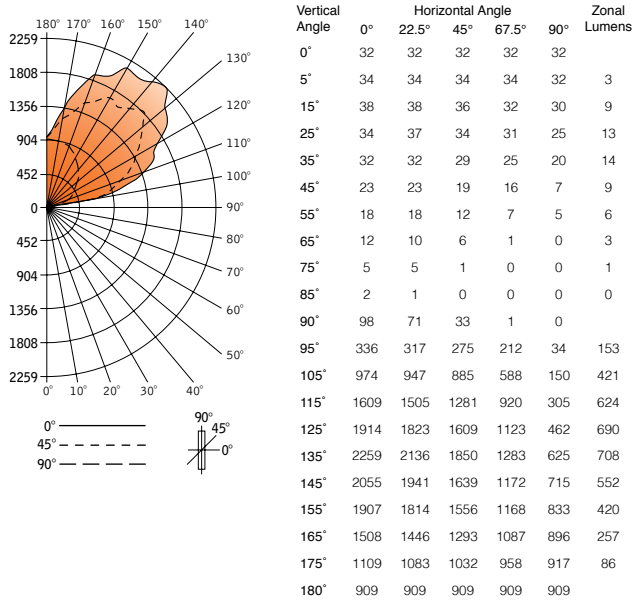

LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixture
90°-120°	25	.5	.6
90°-130°	58	1.2	1.5
90°-150°	1887	37.7	47.6
90°-180°	3910	78.2	98.5
Total Luminaire	3968	79.4	100.0

Go to www.focalpointlights.com for additional photometric data.