


verve™ III

FV3S




FOCAL POINT®

FOCAL POINT

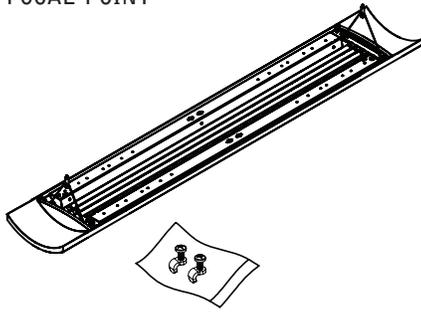


UNIVERSAL SUSPENSION SYSTEM - SHIPS SEPARATELY

OPTIONAL DUST COVER
8.25" W (+/- .10")



UNIT DESCRIPTION

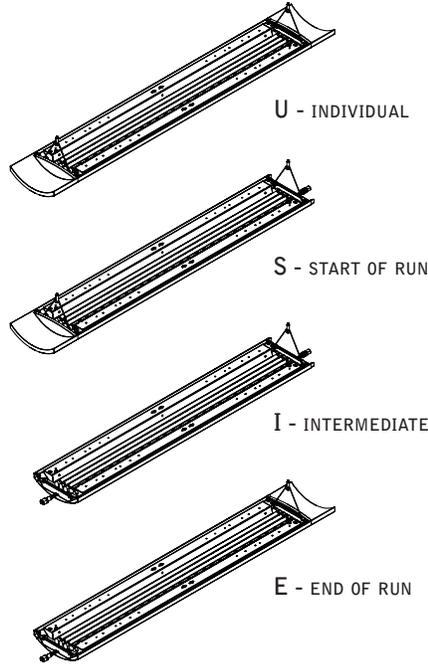

KEY



POWER OFF



POWER ON



LEVEL



ATTENTION



ADDITIONAL INSTRUCTIONS
ISO166




KEEP LUMINAIRE IN ORIGINAL CARTON UNTIL READY TO INSTALL. DO NOT REST ON THE GROUND.



LOCKING SCREW ALLOWS FOR Y-CABLE ADJUSTMENT



1

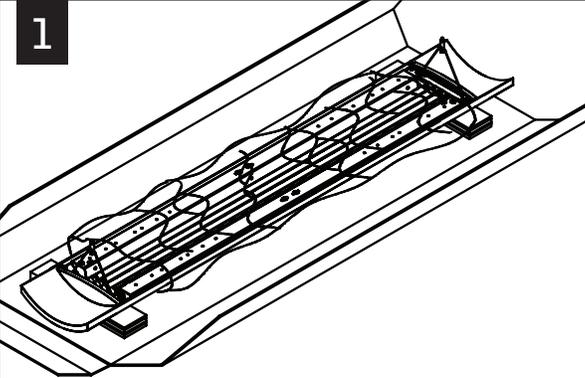



KEEP LUMINAIRE IN ORIGINAL CARTON UNTIL READY TO INSTALL. USE CRADLES TO SUPPORT LUMINAIRE, DO NOT REST ON THE GROUND. PLASTIC PACKAGING SHOULD ONLY BE REMOVED AFTER LUMINAIRE IS INSTALLED






2





FOLLOW FOCAL POINT INSTRUCTIONS FOR UNIVERSAL SUSPENSION SYSTEM ASSEMBLY.

SEE ISO166



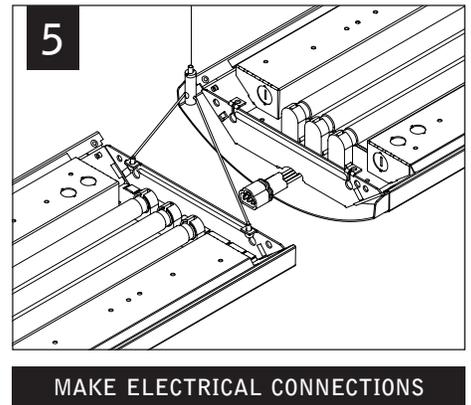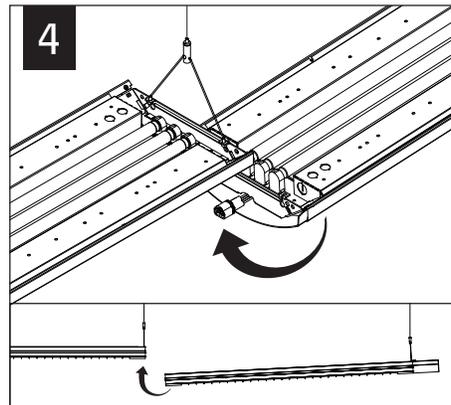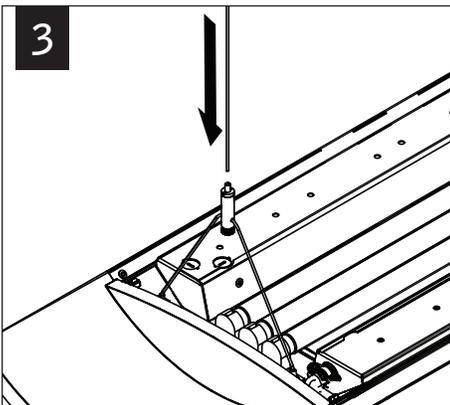

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
To prevent electrical shock, disconnect electrical supply before installation or servicing.

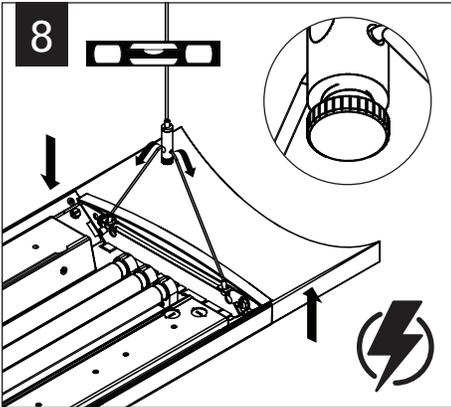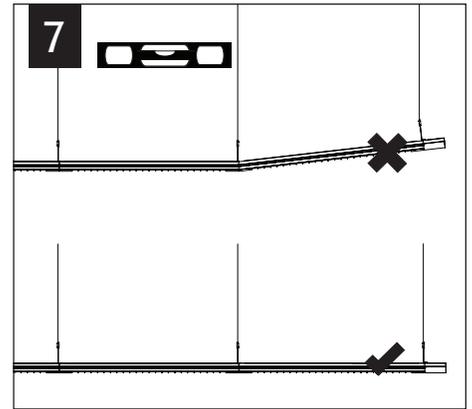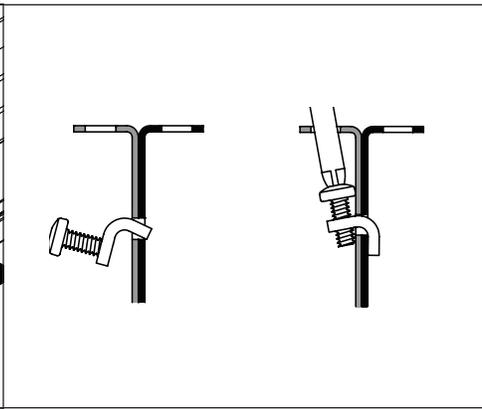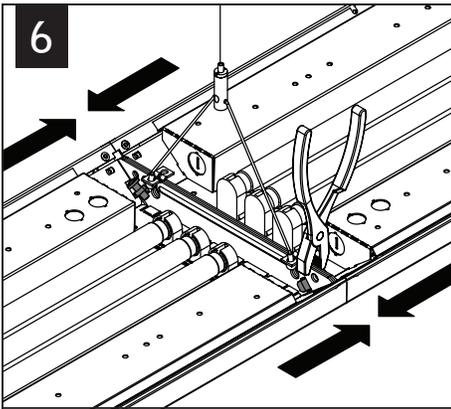


IF LUMINAIRE/RUN IS TWISTED

GRIP HERE, NOT ON END CAP


LOUVER REMOVAL

1 x4

! HOLD LOUVER IN PLACE WHILE RELEASING LEVERS TO PREVENT DAMAGE

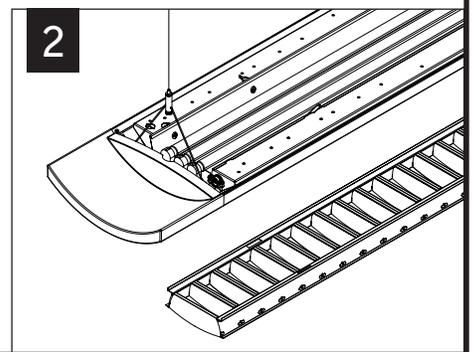

OPTIONAL DUST COVER

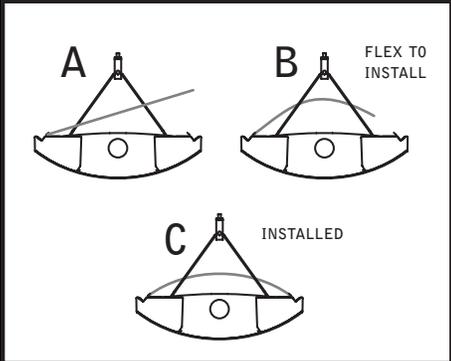

BALLAST SERVICE

! FASTENERS INDICATE BALLAST LOCATIONS

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
To prevent electrical shock, disconnect electrical supply before installation or servicing.

EMERGENCY



SEE BATTERY MANUFACTURER
INSTRUCTIONS

EMERGENCY MAXIMUM MOUNTING HEIGHT:
8.00'