

SPONSOR: **Focal Point**
Chicago, IL

Sound Absorption
RAL™-A24-362

CONDUCTED: 2024-09-18

Page 1 of 9

ON: Polina (wall mounting) 6 units, 2 rows of 3 units each, rows spaced 6" apart, units in rows spaced 6" apart

TEST METHODOLOGY

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM C423-23: "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method." The specimen mounting was performed according to ASTM E795-23: "Standard Practices for Mounting Test Specimens During Sound Absorption Tests." A description of the measurement procedure and room specifications are available upon request. The results presented in this report apply to the sample as received from the test sponsor.

INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as Polina (wall mounting) 6 units, 2 rows of 3 units each, rows spaced 6" apart, units in rows spaced 6" apart. The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

Product Under Test

Product Name: Polina (wall mounting)
Cross Section Thickness: Variable, 5mm – 20mm
Manufacturer: Focal Point

SPECIMEN MEASUREMENTS & TEST CONDITIONS

Through a full external visual inspection performed on the test specimen, Riverbank personnel verified the following information:

Test Specimen

Geometry: Hexagonal baffles with rounded corners
Corner to Corner Distance: 1067 mm (42 in.)
Depth: 76 mm (3 in.)
Overall Weight: 22 kg (48.5 lbs)

Focal Point
2024-09-18

RAL™-A24-362
Page 2 of 9

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

Physical Measurements (per object)

Dimensions: 1.07 m (42.0 in) wide by 1.07 m (42.0 in) long
Depth: 0.08 m (3.0 in)
Weight: 3.67 kg (8.08 lbs)

Test Environment

Room Volume: 291.98 m³
Temperature: 22.1 °C ± 0.0 °C (Requirement: ≥ 10 °C and ≤ 5 °C change)
Relative Humidity: 56.55 % ± 0.1 % (Requirement: ≥ 40 % and ≤ 5 % change)
Barometric Pressure: 98.6 kPa (Requirement not defined)

Each sound absorbing object had an exposed surface area of 1.72 m² (18.5 ft²). The total exposed surface area of all sound-absorbing objects was 10.3 m² (111 ft²). These values are based on a simplification of the specimen object geometry to that of the smallest regular hexagonal prism that fully encloses one object.

MOUNTING METHOD

Type JH-MOD Mounting: The specimen is an array of 6 spaced sound absorbing objects placed directly on the horizontal test surface. This approximates the mounting method of a typical wall baffle installation. The objects were distributed in two rows of three objects each, with rows spaced 152 mm (6 in.) apart, and the objects in each row spaced 152 mm (6 in.) apart. The width of the installed object array was 3505 mm (138 in.) and the length of the installed object array was 2153 mm (84.75 in.). The area of extended continuous surface attributed to the object array was 8.43 m² (90.8 ft²).

Focal Point
2024-09-18

RAL™-A24-362
Page 3 of 9



Figure 1 – Specimen mounted in test chamber



Figure 2 – Individual specimen objects

Focal Point
2024-09-18

RAL™-A24-362
Page 4 of 9



Figure 3 – Detail of specimen materials

Focal Point
2024-09-18

RAL™-A24-362
Page 5 of 9

TEST RESULTS

The preferred presentation of sound absorption test results for arrays of spaced objects is sound absorption (m^2) per object and total sound absorption (m^2) at each one-third-octave band

ASTM C423-23 Appendix X2 allows calculation of sound absorption per m^2 (SA/m^2) based on the projected horizontal surface area attributable to an array of objects. The extended continuous surface area used in this calculation is to be determined using the following procedure:

$S_{array} = (w + w_1) \times (l + l_1)$ If the set of objects consists of a rectangular array of equal sized objects with equal space between each object in a row and equal space between rows. (ASTM E423-23 X.2.3.1)

Where:

S_{array} = area of extended continuous surface attributed to the test specimen, m^2
 w = the measured width of the installed object array, in meters
 w_1 = the space between objects in the array along the width, in meters
 l = the measured length of the installed object array, in meters
 l_1 = the space between objects in the array along the length, in meters

The sound absorption per m^2 (SA/m^2) is calculated based on the following formula:

$$\alpha_{array} = (A_2 - A_1)/S_{array}$$

Where:

α_{array} = sound absorption per m^2 (SA/m^2) of extended continuous surface, no units,
 A_1 = absorption of the empty reverberation room, m^2 and
 A_2 = absorption of the room after the specimen has been installed, m^2 .
 S_{array} = area of extended continuous surface attributed to the test specimen, m^2

Focal Point
2024-09-18

RAL™-A24-362
Page 6 of 9

TEST RESULTS (continued)

1/3 Octave Center Frequency (Hz)	Total Absorption		Absorption per Object		α_{array} (Sabins/ft ²) (SA/m ²)
	(m ²)	(Sabins)	(m ² / Object)	(Sabins / Object)	
100	0.39	4.19	0.06	0.70	0.05
** 125	0.42	4.57	0.07	0.76	0.05
160	0.52	5.60	0.09	0.93	0.06
200	0.61	6.52	0.10	1.09	0.07
** 250	1.08	11.57	0.18	1.93	0.13
315	2.09	22.46	0.35	3.74	0.25
400	2.59	27.85	0.43	4.64	0.31
** 500	4.27	45.96	0.71	7.66	0.51
630	5.78	62.26	0.96	10.38	0.69
800	6.53	70.24	1.09	11.71	0.77
** 1000	6.84	73.61	1.14	12.27	0.81
1250	6.72	72.28	1.12	12.05	0.80
1600	6.40	68.92	1.07	11.49	0.76
** 2000	6.28	67.64	1.05	11.27	0.75
2500	6.14	66.09	1.02	11.01	0.73
3150	6.27	67.49	1.04	11.25	0.74
** 4000	6.36	68.48	1.06	11.41	0.75
5000	6.49	69.83	1.08	11.64	0.77

Array-NRC 0.55 over 8.43 m² of extended continuous surface area

Array-SAA 0.55 over 8.43 m² of extended continuous surface area

Tested by 
Marc Sciaky
Senior Experimentalist

Report by 
Keith Kimberling
Test Engineer

Approved by 
Eric P. Wolfram
Laboratory Manager


Note: Sound absorption per m² (SA/m²), and therefore the reported Single Number Ratings, are highly dependent on the exact sample shape, size, spacing, and extended continuous surface area present in the test and subsequent calculations. Changes to any of these parameters will change the resulting values. These presented results are valid only for the specific configuration present in this test.

Focal Point
2024-09-18

RAL™-A24-362
Page 7 of 9

SOUND ABSORPTION REPORT

Polina (wall mounting) 6 units, 2 rows of 3 units each, rows spaced 6” apart, units in rows spaced 6” apart

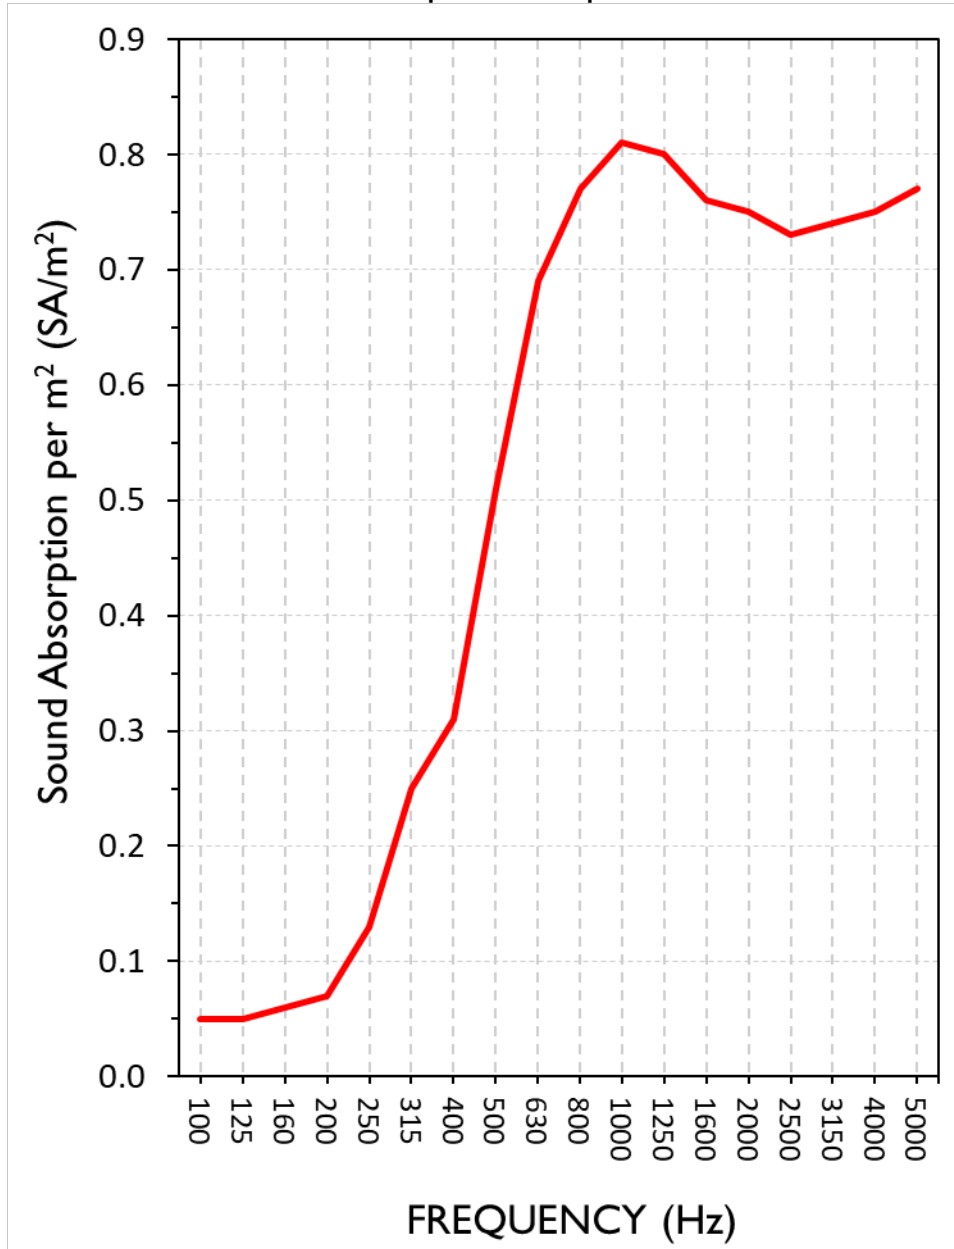

Array-NRC 0.55 over 8.43 m² of extended continuous surface area

Array-SAA 0.55 over 8.43 m² of extended continuous surface area



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

Focal Point
 2024-09-18

RAL™-A24-362
 Page 8 of 9

APPENDIX A: Extended Frequency Range Data

Specimen: Polina (wall mounting) 6 units, 2 rows of 3 units each, rows spaced 6” apart, units in rows spaced 6” apart (See Full Report)

The following non-accredited data were obtained in accordance with ASTM C423-23, but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes.

1/3 Octave Band Center Frequency (Hz)	Total Absorption		Absorption per Object		α_{array} (Sabins/ft ²)
	(m ²)	(Sabins)	(m ² / Object)	(Sabins / Object)	(SA/m ²)
31.5	-0.26	-2.74	-0.04	-0.46	-0.03
40	0.62	6.65	0.10	1.11	0.07
50	-0.13	-1.42	-0.02	-0.24	-0.02
63	0.36	3.87	0.06	0.65	0.04
80	1.09	11.71	0.18	1.95	0.13
100	0.39	4.19	0.06	0.70	0.05
125	0.42	4.57	0.07	0.76	0.05
160	0.52	5.60	0.09	0.93	0.06
200	0.61	6.52	0.10	1.09	0.07
250	1.08	11.57	0.18	1.93	0.13
315	2.09	22.46	0.35	3.74	0.25
400	2.59	27.85	0.43	4.64	0.31
500	4.27	45.96	0.71	7.66	0.51
630	5.78	62.26	0.96	10.38	0.69
800	6.53	70.24	1.09	11.71	0.77
1000	6.84	73.61	1.14	12.27	0.81
1250	6.72	72.28	1.12	12.05	0.80
1600	6.40	68.92	1.07	11.49	0.76
2000	6.28	67.64	1.05	11.27	0.75
2500	6.14	66.09	1.02	11.01	0.73
3150	6.27	67.49	1.04	11.25	0.74
4000	6.36	68.48	1.06	11.41	0.75
5000	6.49	69.83	1.08	11.64	0.77
6300	6.76	72.75	1.13	12.13	0.80
8000	6.75	72.64	1.12	12.11	0.80
10000	6.82	73.44	1.14	12.24	0.81
12500	6.70	72.16	1.12	12.03	0.80



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

Test Report

Focal Point
2024-09-18

RAL™-A24-362
Page 9 of 9

APPENDIX B: Instruments of Traceability

Specimen: Polina (wall mounting) 6 units, 2 rows of 3 units each, rows spaced 6” apart, units in rows spaced 6” apart (See Full Report)

<u>Description</u>	<u>Model</u>	<u>Serial Number</u>	<u>Date of Certification</u>	<u>Calibration Due</u>
System 1	Type 3160-A-042	3160-106974	2024-08-15	2025-08-15
Bruel & Kjaer Mic And Preamp G	Type 4943-B-001	2525858	2024-05-07	2025-05-07
Bruel & Kjaer Pistonphone	Type 4228	2781248	2024-07-19	2025-07-19
EXTECH Hygro 959	SD700	A099959	2024-03-29	2025-03-29

APPENDIX C: Revisions to Original Test Report

Specimen: Polina (wall mounting) 6 units, 2 rows of 3 units each, rows spaced 6” apart, units in rows spaced 6” apart (See Full Report)

<u>Date</u>	<u>Revision</u>
2024-10-03	Original report issued

END