

TruTile™ Textures

ACOUSTIC WALL TILE



FOCAL POINT®




Pinwale & Feathercord vertical pattern




Lattice vertical pattern



Mixed pattern detail



Solid colors
(Deep Water at 25% scale)




The Naturals
(Gray Elm at 25% scale)

TEXTURES (8% scale)




Pinwale
(The Naturals - Walnut)



Feathercord
(Pearl Ice)



Lattice
(Shadow Gray)



Grid 49
(Deep Water)

FEATURES

9mm thick, 2' x 2' square sound absorbing wall tiles available in 4 textural designs or solid panels that can be arranged to create a myriad of unique patterns.


Wide range of color options provides design flexibility and personalization for any project.

Available with The Naturals, a series of finishes that exude biophilic beauty.


Pair with Focal Point acoustic luminaires and unlit baffles to create a coordinated look within interior spaces.

See also TruTile Designs and TruTile Shapes for more coordinated wall tile options.

DIMENSIONAL DATA




2' x 2' Tile




Pinwale & Feathercord vertical pattern


PATTERN INSPIRATIONS

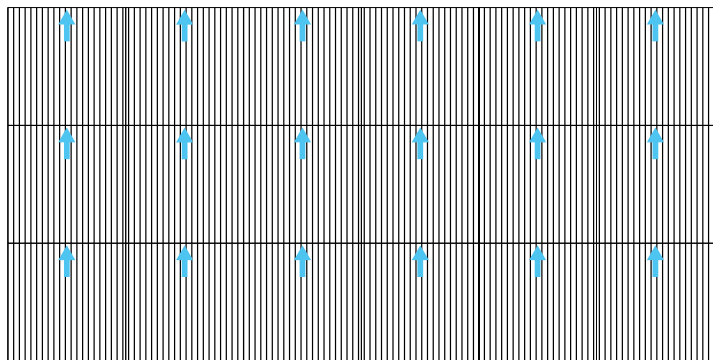


Pinwale vertical pattern

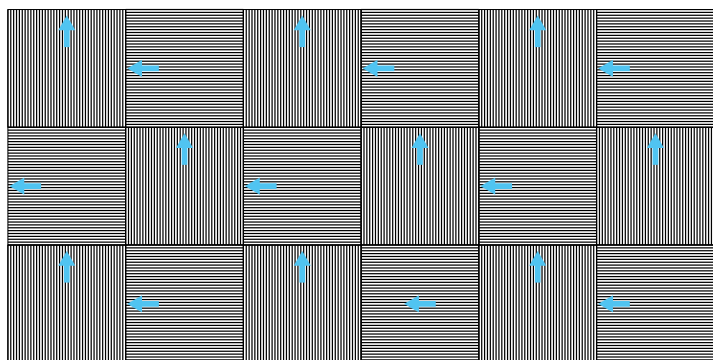

Feathercord horizontal/vertical alternating pattern

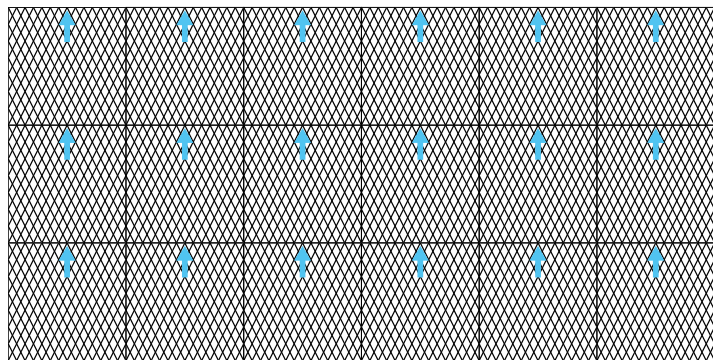

Lattice vertical pattern

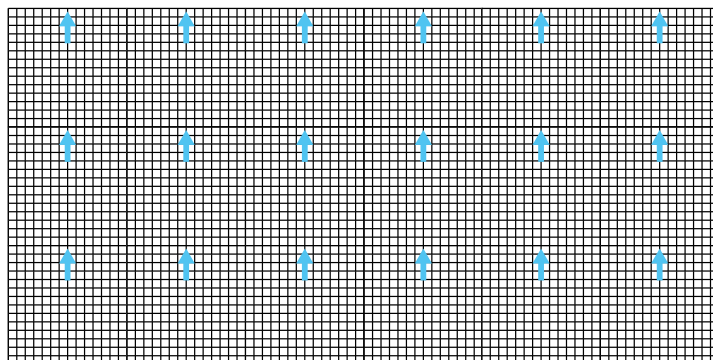

Grid 49 vertical pattern

ORDERING

Series	AUTT
TruTile	AUTT
Size	22
2' x 2' panel	22
Shape	SQ
Square	SQ
Design	
Pinwale	PWL
Feathercord	FCD
Lattice	LTC
Grid 49	G49
Solid	SD

Mounting **SM**

Surface Mount by others SM

(Construction glue direct to surface recommended)

Acoustic Tile Color

See page 3 for color offering



Options in orange qualify for the Quickship program. Five color options. 10-day up to 200 pieces. Refer to Quickship Guide for complete details.

SPECIFICATIONS

Acoustic Material

Content	Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant. See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions. Lead times vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com. Contact acoustic.solutions@focalpointlights.com for technical questions.

NRC	Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. NRC = 0.30
------------	--

Weight

1.8 lbs per tile. Ships up to (12) twelve per box = 25.25" x 25.25" x 5".

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.


Warranty

1-year limited warranty.

Acoustic Materials




THE NATURALS (25% SCALE)

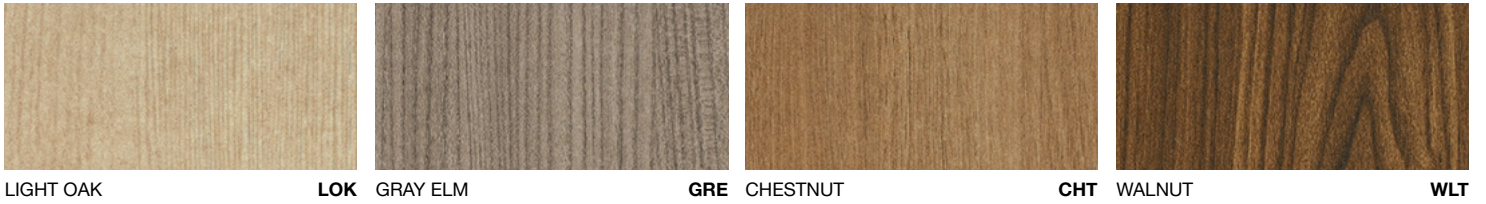

STANDARD PET



PREMIUM PET

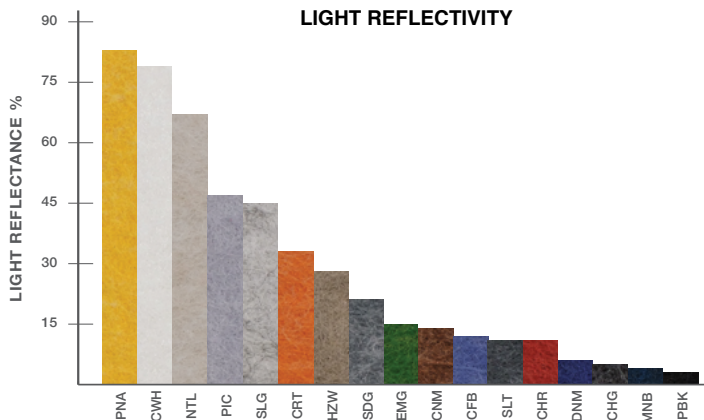

Declare.

9mm PET Felt
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 30 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:

Polyethylene terephthalate: PET; **N, N'-Ethylene bisstearamide:** Octadecanamide, N,N'-1,2-ethanediylbis-; **Stearic Acid;** **Antioxidant 1076:** Benzenepropanoic acid, 3,5-bis(1,1-dimethylethyl)-4-hydroxy-, octadecyl ester; **Antioxidant KY-405:** Benzenamine, 4-(1-methyl-1-phenylethyl) -N-[4-(1-methyl-1-phenylethyl)phenyl]-; **Titanium Dioxide:** Titanium dioxide

Living Building Challenge Criteria: Compliant

I-13 Red List:

- LBC Red List Free
- LBC Red List Approved
- Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: CDPH Standard Method v1.2-2017
I-14 Responsible Sourcing: Not Applicable

FPL-0001
EXP. 01 APR 2025
Original Issue Date: 2020

MANUFACTURED BY: FOCAL POINT, LLC
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare