

# ID+ 4.5" Trimless

LED WALL WASH




clear diffuse




warm diffuse



white




black



overlap companion

## DIMENSIONAL DATA

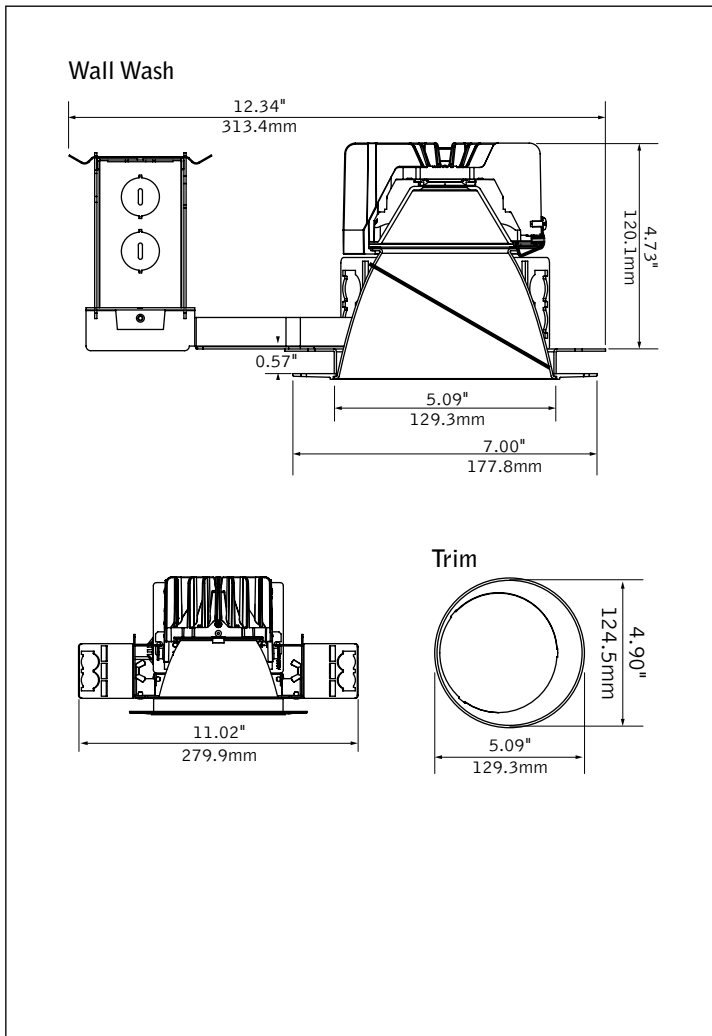

## FEATURES

Field adjustability of ceiling thickness from 0.5" to 3.0"


50° cutoff to light source and its image.

Right Light: Standard delivered lumen outputs 1000, 1500, 2000, 2500, and 3000.

Warm Dim: Lighting that enhances spaces with a warm glow, reminiscent of incandescent or halogen light sources.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.


## PERFORMANCE

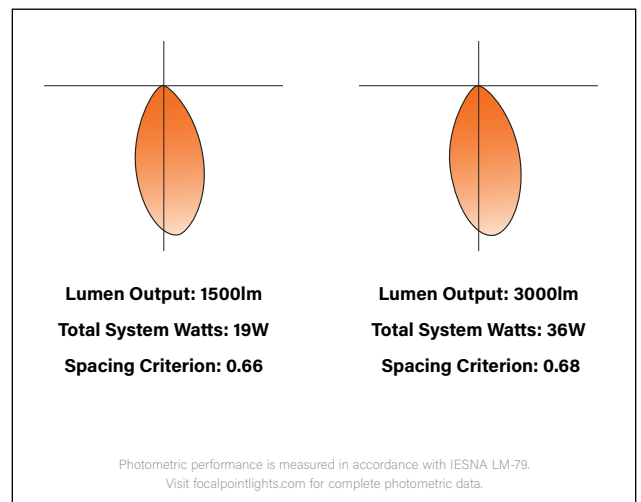

fixture:

project:

**HOUSING DETAILS**

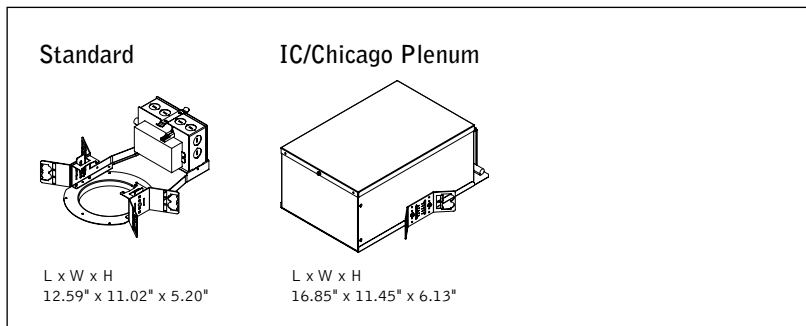

**HOUSING SPECIFICATIONS**

**Construction**

Thermally protected housing for new construction applications. Insulation to be kept 3" away from housing. Type IC inherently protected, suitable for direct contact with insulation. Butterfly brackets allow mounting to 1/2" emt. Order bar hangers as an accessory. Die-cast aluminum heat sink designed for maximum thermal dissipation. Die-formed housing and integral junction box with (7) 1/2" pry-outs. T-rated: UL & cUL Listed for (6) #14 AWG (3 in, 3 out) 90°C conductors and feed through-branch wiring. IC/CP housing: UL & cUL Listed for (8) #12 AWG (4 in, 4 out) 90°C conductors and feed through-branch wiring for IC/CP housing. Accommodates ceiling thicknesses up to 0.5" standard, field adjustable up to 3.0" thickness. For thicker ceiling consult factory. Order TZB option for TechZone compatible housing brackets. T-rated housing will not exceed 6lb, IC/CP housing will not exceed 12lb.

**Electrical**

Choice of constant current dimming drivers. Power factor > .9 typical. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

**Labels**

UL and cUL Listed. Suitable for Dry, Damp or Wet Locations, indoor use only. Specify Outdoor rated (OD) for outdoor recessed ceiling applications.

**Lumen Maintenance**

Reported: L70 at >55,000 hours      Calculated: L70 at 204,000 hours  
L90 at >55,000 hours                      L90 at 59,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

**Reliability**

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

**Warranty**

LED System rated for operation in ambient environments up to 25°C. 5-year limited warranty. Fixture with Outdoor rated option must be installed in a covered ceiling and is warranted for operation in ambient environments between -20°C to +40°C.

**TRIM & LED SPECIFICATIONS**

**LED System**

Proprietary array incorporates premium LEDs on a robust platform. May be specified in 2700K, 3000K, 3500K or 4000K, 80+ CRI or 90+ CRI. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. Color accuracy within 2 SDCM. Aluminum heat sink provides appropriate thermal management.

**Aesthetics**

Parabolic reflector cone ensures glare free optics. Reflector is .050" spun aluminum. Torsion springs pull trim tight to the ceiling with no visible fasteners.

**Optics**

50-degree cut-off to light source and its image. Wall wash features acrylic diffuser to provide smooth illumination down the wall.

**PERFORMANCE CHART**

Lumen Output	Delivered Lumens	System Watts	LPW
1000L	978	11	86
1500L	1471	19	77
1500L	1360	25	54
2000L	1954	26	76
2000L	1914	37	52
2500L	2384	32	74
3000L	2860	36	79

Based on 3500K, 80 CRI. White. WDM base on 3000 - 1800K, 90 CRI. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

**HOUSING ORDERING**

<b>Housing Series</b>	<b>FLC4W</b>
ID+ 4.5" Round Wall Wash	FLC4W
<b>Trim Type</b>	<b>RT</b>
Round Trimless	RT
<b>Color Options</b>	
Standard White, 80 & 90 CRI	SW
Warm Dim	WDM
<small>(1500 &amp; 2000 lumens only. UNV not available.)</small>	
<b>Lumen Output</b>	
1000 Lumens	1000L
1500 Lumens	1500L
2000 Lumens	2000L
2500 Lumens	2500L
3000 Lumens	3000L
<small>(Not available with LFP)</small>	
<b>Voltage</b>	
UNV 120V/277V	UNV
<small>(IC housing only. Not available with LFP)</small>	
120V	120
277V	277
<b>Low Voltage</b>	LV
<small>(IC housing: 2000L max. T &amp; TW housings: 1000L only)</small>	
<b>Control System &amp; Dimming Level</b>	
0-10V - 0% Dimming	LZ1
0-10V - 1% Dimming	L11
0-10V - 10% Dimming	LD1
<b>Low Voltage, PoE compatible</b>	LVN
<small>(No driver. LV Voltage only)</small>	
<b>Forward Phase</b>	LFP
<small>(120V only)</small>	
<b>Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming</b>	LH1
<b>DALI - 0% Dimming</b>	DZ1
<b>DALI - 1% Dimming</b>	D11
<b>Housing Type</b>	
IC Rated / Airtight	IC
<small>(L11, LD1, LVN, LH1 2000L max. LZ1, DT1, DZ1, LFP 1500L max. LC4AT required for Airtight.)</small>	
<b>Thermally Protected, Non-IC</b>	T
<b>Thermally Protected, Non-IC Wood</b>	TW
<small>(Wood ceiling installation kit required)</small>	
<b>Factory Options</b>	
Bar Hangers	BH
Chicago Plenum	CP
Outdoor Rated	OD
<small>(LD1 driver only. IC housing 1500L max. Consult factory for dimming range.)</small>	
<b>TRIM &amp; LED MODULE</b>	
<b>Aperture</b>	
4.5" Round Reflector	LC4
4.5" Round Reflector - Airtight	LC4AT
<small>(IC housing required for Airtight rating)</small>	
<b>Trim Type</b>	<b>RT</b>
Round Trimless	RT
<b>Lumen Output</b>	
<small>(Trim &amp; Housing output must match)</small>	
1000 Lumens	1000L
1500 Lumens	1500L
2000 Lumens	2000L
2500 Lumens	2500L
3000 Lumens	3000L
<b>Color Temperature</b>	
2700K, 80+ CRI or 90+ CRI	27K or 927K
3000K, 80+ CRI or 90+ CRI	30K or 930K
3500K, 80+ CRI or 90+ CRI	35K or 935K
4000K, 80+ CRI or 90+ CRI	40K or 940K
Warm Dim: 2700-1800K, 90+ CRI	92718W
<small>(1500 &amp; 2000 lumens only)</small>	
Warm Dim: 3000-1800K, 90+ CRI	93018W
<small>(1500 &amp; 2000 lumens only)</small>	
<b>Optic</b>	<b>WW</b>
Wall Wash	WW
<b>Color</b>	
Clear Diffuse	CD
Warm Diffuse	WD
Black	BK
White	WH
<b>ACCESSORIES</b>	
Wood Ceiling Installation Kit	LC4-WOOD-KIT
<small>(One kit recommended per 10 downlights)</small>	



Options in orange qualify for the Quickship program. 5-day up to 100 pieces. Refer to Quickship Guide for complete details.