



Seem[®] 2


LED WALL TO CEILING CORNER



recessed



wall mount companion




suspended companion



perimeter companion

DIMENSIONAL DATA

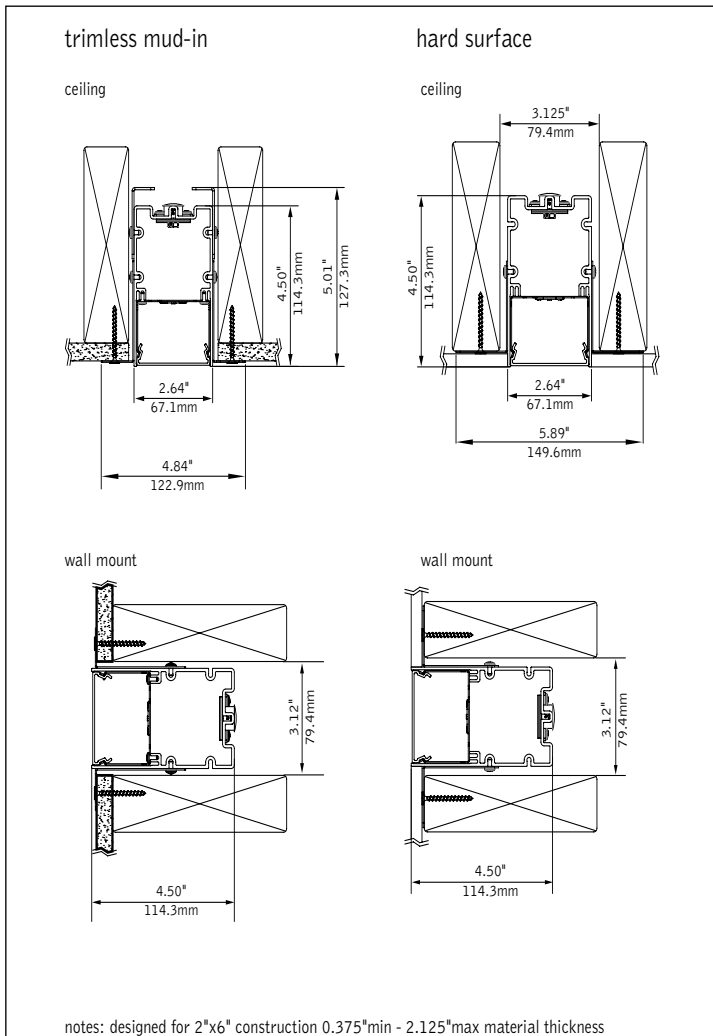

FEATURES

Narrow extruded aluminum 2.5" aperture recessed slot LED that transitions from wall to ceiling.

Clean and minimal trimless drywall mounting.


Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.


Choice of output levels to meet a wide variety of application needs.

Tunable White: Supports human activity, well-being, and preferences with a light quality that evolves throughout the day.

PERFORMANCE

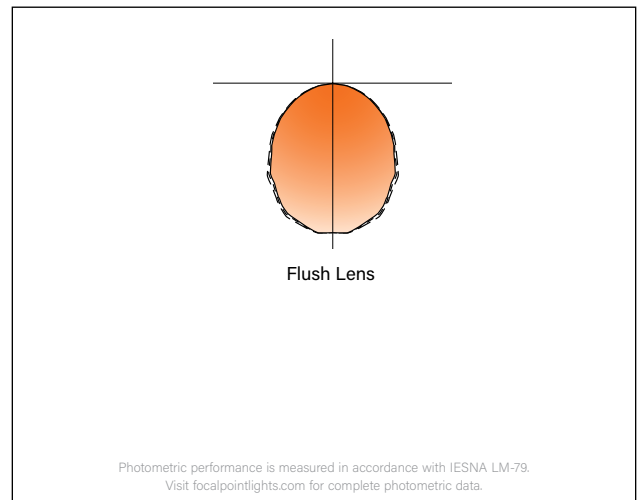

MOUNTING INFORMATION

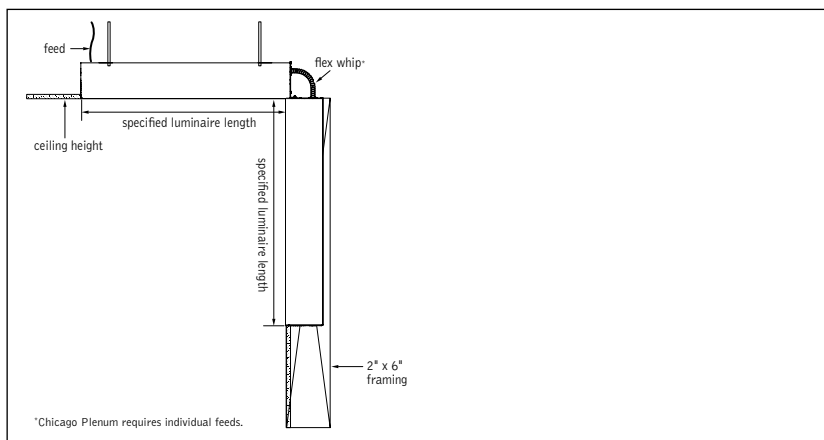

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3SDCM. LED modules and drivers are replaceable from below.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Housing for new construction applications. XFW acceptable for use with wood, consult factory for Type IC availability. Flush lens weights: 4' unit: 12.2 lbs., 8' unit: 24.4 lbs. Regress lens weights: 4' unit: 13.2 lbs., 8' unit: 26.4 lbs..

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .07" thick with satin finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9.

Emergency Battery

Output - 10 watts for 90 minutes. Maximum mounting height: 17.9ft. See EM/EC Guide for default locations and ordering details.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 at >61,000 hours Calculated: L70 at 385,000 hours
 L90 at >61,000 hours L90 at 103,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
	125LF	500	5.6	89
	250LF	1000	9.0	111
	375LF	1500	12.4	121
Flush Lens	500LF	2000	16.2	124
	625LF	2500	20.8	120
	750LF	3000	24.9	120
	875LF	3500	29.3	119
	1000LF	4000	33.8	118

Based on 3500K, 4' lengths. Lumen multiplier: Continuous runs = 0.93 Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Focal Point LLC reserves the right to change specifications for product improvement without notification.


STANDARD WHITE

Luminaire Series		FSM2L
Seem 2 LED		FSM2L
Shielding		FL
Flush Lens		FL
Lumen Output		
125 Lumens per foot <small>(LD1, L11 & D11 only. 4' minimum.)</small>		125LF
250 Lumens per foot <small>(3' minimum with LH1)</small>		250LF
375 Lumens per foot		375LF
500 Lumens per foot		500LF
625 Lumens per foot		625LF
750 Lumens per foot		750LF
875 Lumens per foot		875LF
1000 Lumens per foot		1000LF
Color Temperature		
2700K, 80+ CRI or 90+ CRI		27K or 927K
3000K, 80+ CRI or 90+ CRI		30K or 930K
3500K, 80+ CRI or 90+ CRI		35K or 935K
4000K, 80+ CRI or 90+ CRI		40K or 940K
Circuit		1C
Single Circuit		1C
Voltage		
UNV 120/277 Volt		UNV
347 volt <small>(LD1 and L11 driver only)</small>		347V
Control System & Dimming Level		
0-10V - 10% Dimming		LD1
0-10V - 1% Dimming		L11
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming		LH1
DALI - 1% Dimming		D11
Ceiling Configuration		
Wall to Ceiling corner, 1/2" Drywall		CXF1
Wall to Ceiling corner, 5/8" Drywall		CXF2
Wall to Ceiling corner, any Drywall Thickness		CXFF
Wall to Ceiling corner, Hard Surface, Non-Drywall		CXFN
Wall to Ceiling corner, Wood		CXFW
Factory Options		
Chicago Plenum		CP
Emergency Circuit		_EC
Emergency Battery Pack <small>(4' minimum. See EM/EC Guide for default locations and ordering details.)</small>		_EM
6' New York City Flex Whip (120V)		FNY1
6' New York City Flex Whip (277V)		FNY2
6' Flex Whip		FW
Finish		WH
Matte White Housing		WH
Luminaire Length		
Specify luminaire/row length in 1' increments		X'CX'W
<small>Example: 12C6W=12' in ceiling, 6' in wall</small>		

fixture:

project:

TW 4' PERFORMANCE CHART

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Flush Lens 	125LF	500	7.25	69.0
	250LF	1000	12.90	80.9
	375LF	1500	18.55	85.7
	500LF	2000	24.21	87.9
	625LF	2500	29.86	89.2
	750LF	3000	34.34	92.9
	875LF	3500	39.71	93.5
	1000LF	4000	45.08	93.7

Based on 2700K, 80CRI, 4' lengths. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

Lumen Multiplier

Wattage Multipliers

CRI	Multiplier	CCT	Multiplier
80+	1.00	2700K	1.00
90+	0.89	3000K	0.92
		3500K	0.88
		4000K	0.86
		5000K	0.85
		5700K	0.87

TW

TUNABLE WHITE

Luminaire Series	Seem 2 LED	FSM2L	FSM2L
Shielding	Flush Lens	FL	FL
Lumen Output	125 Lumens per foot	125LF	
	250 Lumens per foot	250LF	
	375 Lumens per foot	375LF	
	500 Lumens per foot	500LF	
	625 Lumens per foot	625LF	
	750 Lumens per foot	750LF	
	875 Lumens per foot	875LF	
	1000 Lumens per foot	1000LF	
Color Temperature	Tunable White: 2700-6500K, 80+ CRI	2765T	
	Tunable White: 2700-6500K, 90+ CRI	92765T	
Circuit	Single Circuit	1C	1C
Voltage	UNV 120/277 Volt	UNV	
	347 volt (LD1 and L11 driver only)	347V	
Control System & Dimming Level	DALI - 1% Dimming*	D1TW	D1TW
<small>(Default driver offers DT6 control. It requires two addresses, one for intensity & one for CCT tuning. Consult factory for DT8. Extended lead time applies.)</small>			
Ceiling Configuration	Wall to Ceiling corner, 1/2" Drywall	CXF1	
	Wall to Ceiling corner, 5/8" Drywall	CXF2	
	Wall to Ceiling corner, any Drywall Thickness	CXFF	
	Wall to Ceiling corner, Hard Surface, Non-Drywall	CXFN	
	Wall to Ceiling corner, Wood	CXFW	
Factory Options	Chicago Plenum	CP	
	Emergency Circuit	_EC	
	Emergency Battery Pack	_EM	
<small>(4' minimum. See EM/EC Guide for default locations and ordering details.)</small>			
	6' New York City Flex Whip (120V)	FNY1	
	6' New York City Flex Whip (277V)	FNY2	
	6' Flex Whip	FW	
Finish	Matte White Housing	WH	WH
Luminaire Length	Specify luminaire/row length in 1' increments	X'CX'W	
<small>Example: 12C6W=12' in ceiling, 6' in wall</small>			