



**FOCAL POINT®**

Bringing It All To Light®

**2025 VOL. 1**

January 17, 2025

# Quickship Guide

**5 & 10 DAY**



# Quickship Policies

Quickship is a broad, made-to-order offering of architectural luminaires that support all main areas of a project. We leverage our vertical integration and on-site manufacturing capabilities to ship a wide variety of options in 5 and 10 days. Unlike a stock program, Quickship gives you the ability to satisfy tight project schedules without sacrificing quality or selection.

## HOW TO USE THIS GUIDE

The product options included in this guide all qualify for Quickship. Simply complete a catalog number by selecting the options you require and clearly mark your order as Quickship for fast processing. For more information or an expanded list of options, please consult the individual product cut sheets at [focalpointlights.com](http://focalpointlights.com).

## QUICKSHIP POLICIES

Quickship line items must be denoted as such to ship with the 5- or 10-day terms of the program whether an entire order is comprised of only Quickship items or it includes both Quickship and standard line items.

Items with different lead times will ship separately unless the order is marked as "SHIP COMPLETE". In that case, the entire order will ship with the longest lead time.

Estimated ship dates (ESD) are determined per the following example: If a clean order is received by 11:00am CST on Monday for a 5-day item, the ESD for that item will be the following Monday. Orders received after 11am will receive an ESD based on the following business day.

## ORDER CHECKLIST

- Complete and correct catalog numbers
- **Quickship** clearly denoted in subject line of email and on PO
- Complete PO with proper terms
- Run lengths when required
- EM/EC locations and voltage when required

## REMINDERS

1. All ship dates are estimated. 5- and 10-day lead times do not include weekends or holidays.
2. Consult factory for options or quantities not shown in this guide. Large quantities may not qualify for Quickship.
3. Partial shipments may be required based on current factory loads.
4. Change orders of any kind will affect lead time.

## CONTRACTOR SUPPORT

With our Quickship program and a host of resources found in the Contractor Zone of our website, we support quick-turn and design-build projects from specification to installation.

Learn more at [focalpointlights.com/contractorzone](http://focalpointlights.com/contractorzone)





# Quickship Index

## ACOUSTIC BAFFLES ..... 5

Seem® 1 Acoustic Direct ..... 6  
 Seem® 1 Acoustic Direct/Indirect ..... 6  
 Seem® 1 Acoustic Indirect ..... 6  
 Seem® 1 Acoustic Unlit ..... 7  
 AirCore Blade® ..... 7

## ACOUSTIC TILES ..... 9

TruTile™ Designs ..... 10  
 TruTile™ Textures ..... 10  
 TruTile™ Shapes ..... 10

## RECESSED LINEAR ..... 12

Seem® 1 Grid & Drywall/Hard Ceiling ..... 13  
 Seem® 2 Drywall/Hard Ceiling ..... 13  
 Seem® 2 Grid ..... 13  
 Seem® 4 Drywall/Hard Ceiling ..... 14  
 Seem® 4 Grid ..... 14

## PERIMETER ..... 15

Seem® 2 Perimeter ..... 16  
 Seem® 4 Perimeter ..... 16

## SUSPENDED, SURFACE & WALL MOUNT LINEAR ..... 18

Seem® 1 Direct ..... 19  
 Seem® 1 Direct/Indirect ..... 19  
 Seem® 2 Direct ..... 20  
 Seem® 2 Wall Mount ..... 20  
 Seem® 2 Direct/Indirect ..... 21  
 Seem® 2 Direct/Indirect Wall Mount ..... 21

Seem® 4 Direct ..... 22  
 Seem® 4 Wall Mount ..... 22  
 Seem® 4 Direct/Indirect ..... 23  
 Seem® 4 Direct/Indirect Wall Mount ..... 23

## ID+ DOWNLIGHTS ..... 25

ID+ 3.5" Downlight ..... 26  
 ID+ 3.5" Wall Wash ..... 26  
 ID+ 3.5" Downlight Trimless ..... 27  
 ID+ 3.5" Wall Wash Trimless ..... 27  
 ID+ 3.5" x 3.5" Downlight ..... 28  
 ID+ 3.5" x 3.5" Wall Wash ..... 28  
 ID+ 3.5" x 3.5" Downlight Trimless ..... 29  
 ID+ 3.5" x 3.5" Wall Wash Trimless ..... 29  
 ID+ 4.5" Downlight ..... 30  
 ID+ 4.5" Wall Wash ..... 30  
 ID+ 4.5" Downlight Trimless ..... 31  
 ID+ 4.5" Wall Wash Trimless ..... 31  
 ID+ 4.5" x 4.5" Downlight ..... 32  
 ID+ 4.5" x 4.5" Wall Wash ..... 32  
 ID+ 4.5" x 4.5" Downlight Trimless ..... 33  
 ID+ 4.5" x 4.5" Wall Wash Trimless ..... 33

## ID+ CYLINDERS ..... 34

ID+® 3.5" Cylinder Pendant ..... 35  
 ID+® 3.5" Cylinder Surface Mount ..... 36  
 ID+® 3.5" Pure Cylinder Pendant ..... 35  
 ID+® 3.5" Pure Cylinder Surface Mount ..... 36  
 ID+® 4.5" Cylinder Pendant ..... 35  
 ID+® 4.5" Cylinder Surface Mount ..... 36

## ARCHITECTURAL TROFFERS ..... 38

Amica® 2 1' x 2' | 2' x 2' ..... 39  
 Amica® 2 1' x 4' | 2' x 4' ..... 39  
 Equation® 2 1' x 4' ..... 40  
 Equation® 2 2' x 2' ..... 40  
 Equation® 2 2' x 4' ..... 40  
 Luna® LED 2' x 2' ..... 41  
 Luna® LED 2' x 4' ..... 41

## FEATURE KEY

	Wet Location		Energy Star
-------------------------------------------------------------------------------------	--------------	-------------------------------------------------------------------------------------	-------------

# ACOUSTIC BAFFLES

- Seem® 1 Acoustic
- AirCore® Blade







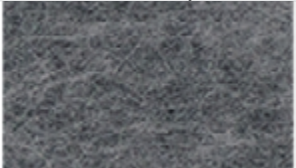



# ACOUSTIC BAFFLES



## QUICKSHIP TERMS


**10 DAY:** Five color options. Maximum linear feet is 200' of acoustic products per order.

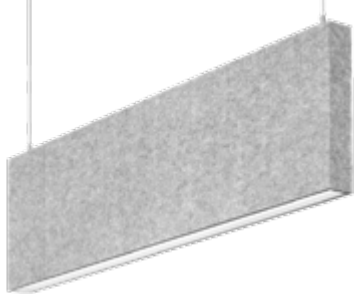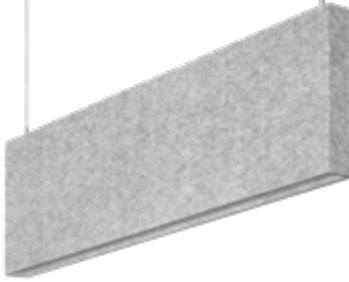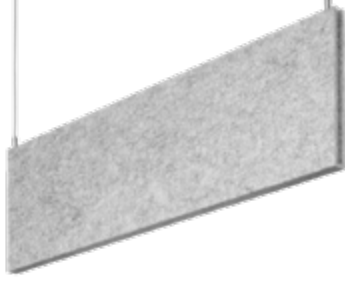**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

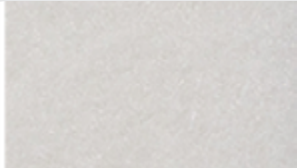	SEEM 1 ACOUSTIC		AIRCORE BLADE		
					
<b>Options</b>					
<b>Distribution</b>	Direct Direct/Indirect		Indirect Unlit		Unlit
<b>Shielding Direct</b>	Asymmetric Wall Wash Batwing Lens Regress Lens		Solid Bottom		-
<b>Shielding Indirect</b>	Batwing Optic Dust Cover		Batwing Optic Dust Cover		-
<b>Height</b>	8", 12", 16"		8", 12", 16"		8", 12", 16"
<b>Lumens per Foot Direct &amp; Indirect</b>	↓ 100 - 500 ↑ 125 - 800		↑ 125 - 800		-
<b>Color Temperature</b>	80 & 90 CRI 3000K, 3500K, 4000K		80 & 90 CRI 3000K, 3500K, 4000K		-
<b>Mounting</b>	Cable Suspension Surface Mount (Direct only)		Cable Suspension Surface Mount (Unlit only)		Cable Suspension Surface Mounted
<b>Factory Options</b>	Black Cord Emergency Circuit Emergency Battery Pack		Black Cord (Indirect only)		-
<b>Length</b>	4', 6', 8', 10', 12', 14', or 16'		4', 6', 8', 10', 12', 14', or 16'		4', 6' or 8'
<b>Acoustic Panel Color</b>					
	Charcoal Gray - CHG	Shadow Gray - SDG	Silver Gray - SLG	Natural Linen - NTL	Classic White - CWH


# ACOUSTIC BAFFLES

## Seem 1 Acoustic Direct




<b>Seem 1 Acoustic</b>	—	<b>ASM1S</b>
<b>Shielding</b>		
Asymmetric Wall Wash	AS	
Batwing Lens	BW	
Regress Lens	RL	
<b>Luminaire Height</b> <small>(heights are nominal)</small>		
8"	8	
12"	12	
16"	16	
<b>Lumen Output</b>		
100 Lumens per foot <small>(4' minimum.)</small>	100LF	
200 Lumens per foot	200LF	
300 Lumens per foot	300LF	
400 Lumens per foot	400LF	
500 Lumens per foot	500LF	
<b>Color Temperature</b>		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
<b>Circuits &amp; Zones</b>		
1 Circuit, non-emergency	1C	
<b>Voltage</b>		
120/277 UNV Volt	UNV	
<b>Control System &amp; Dimming Level</b>		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
<b>Mounting</b>		
<b>Suspended</b> <small>(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)</small>		
96" Cable Suspension	J96_	
120" Cable Suspension	J120_	
<small>(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WH.) (Consult factory for sloped ceiling applications)</small>		
<b>Surface Mounted</b> <small>(30" power cable standard. Consult factory for longer power cable lengths.)</small>		
Direct/Flush to Grid	DTG	
Direct/Flush to Strut	DTS	
<b>Factory Options</b>		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Acoustic Panel Color</b>		
See previous chart for color offering		
<b>Length</b> <small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field)</small>		
4', 6', 8', 10', 12', 14', or 16'		

## Seem 1 Acoustic Direct/Indirect



<b>Seem 1 Acoustic Direct/Indirect</b>	—	<b>ASM1BS</b>
<b>Shielding</b>		
Batwing Optic Top/Asymmetric Wall Wash Bottom	BWAS	
Batwing Optic Top/Batwing Lens Bottom	BWBW	
Batwing Optic Top/Regress Lens	BWRL	
Dust Cover Top/Asymmetric Wall Wash Bottom	DCAS	
Dust Cover Top/Batwing Lens Bottom	DCBW	
Dust Cover Top/Regress Lens	DCRL	
<b>Luminaire Height</b> <small>(heights are nominal)</small>		
8"	8	
12"	12	
16"	16	
<b>Direct Distribution</b>		
100 Lumens per foot	100DN	
200 Lumens per foot	200DN	
300 Lumens per foot	300DN	
400 Lumens per foot	400DN	
500 Lumens per foot	500DN	
<b>Indirect Distribution</b>		
125 Lumens per foot <small>(Consult factory for Lutron &amp; DALI)</small>	125UP	
250 Lumens per foot	250UP	
375 Lumens per foot	375UP	
500 Lumens per foot	500UP	
625 Lumens per foot	625UP	
800 Lumens per foot	800UP	
<b>Color Temperature</b>		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
<b>Circuits &amp; Zones</b>		
1 Circuit, non-emergency	1C	
2 non-emergency circuits provide independent control of Direct and Indirect sources	2C	
<b>Voltage</b>		
120/277 UNV Volt	UNV	
<b>Control System &amp; Dimming Level</b>		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
<b>Mounting</b> <small>(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)</small>		
96" Cable Suspension	J96_	
120" Cable Suspension	J120_	
<b>Factory Options</b>		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Acoustic Panel Color</b>		
See previous chart for color offering		
<b>Length</b> <small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field)</small>		
4', 6', 8', 10', 12', 14', or 16'		


## Seem 1 Acoustic Indirect



<b>Seem 1 Acoustic Indirect</b>	—	<b>ASM1S</b>
<b>Shielding</b>		
Batwing Top/Solid Bottom	BWSD	
Dust Cover Top/Solid Bottom	DCSD	
<b>Luminaire Height</b> <small>(heights are nominal)</small>		
8"	8	
12"	12	
16"	16	
<b>Lumen Output</b>		
125 Lumens per foot <small>(4' minimum.)</small>	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
800 Lumens per foot	800LF	
<b>Color Temperature</b>		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
<b>Circuit</b>		<b>1C</b>
Single Circuit	1C	
<b>Voltage</b>		
120/277 UNV Volt	UNV	
<b>Control System &amp; Dimming Level</b>		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
<b>Mounting</b> <small>(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)</small>		
96" Cable Suspension	J96_	
120" Cable Suspension	J120_	
<b>Factory Options</b>		
Black Cord	BKCD	
<b>Acoustic Panel Color</b>		
See previous chart for color offering		
<b>Length</b> <small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)</small>		
4', 6', 8', 10', 12', 14', or 16'		


# ACOUSTIC BAFFLES

## Seem 1 Acoustic Unlit



<b>Seem 1 Acoustic Unlit</b>	—	<b>AUSM1S</b>
<b>Shielding</b>		<b>SD</b>
Solid Bottom	SD	
<b>Baffle Height</b>		
<small>(heights are nominal)</small>		
8"	8	
12"	12	
16"	16	
<b>Mounting</b>		
<b>Suspended</b>		
<small>(Mounting hang kits ship with order)</small>		
96" Cable Suspension	J96__	
120" Cable Suspension	J120__	
<small>(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WH.)</small>		
<small>(Consult factory for sloped ceiling applications)</small>		
<b>Surface Mounted</b>		
Direct/Flush to Grid	DTG	
Direct/Flush to Strut	DTS	
No Hardware	NH	
<b>Acoustic Panel Color</b>		
See previous chart for color offering		
<b>Baffle Length</b>		
4', 6', 8', 10', 12', 14', or 16'		
<small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)</small>		

## AirCore Blade



<b>AirCore Blade</b>	—	<b>AUABS</b>
<b>Baffle Height</b>		
<small>(heights are nominal)</small>		
8"	8	
12"	12	
16"	16	
<b>Mounting</b>		
<b>Suspended</b>		
<small>(Mounting hang kits ship with order)</small>		
96" Cable Suspension	J96__	
120" Cable Suspension	J120__	
<small>(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WH.)</small>		
<small>(Consult factory for sloped ceiling applications)</small>		
<b>Surface Mounted</b>		
Direct/Flush to Grid	DTG	
Direct/Flush to Strut	DTS	
No Hardware	NH	
<b>Acoustic Panel Color</b>		
See previous chart for color offering		
<b>End Caps</b>		
No End Caps	NC	
<b>Baffle Length</b>		
4', 6', or 8'		
<small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)</small>		

# ACOUSTIC TILES

- TruTile™ Designs
- TruTile™ Textures
- TruTile™ Shapes









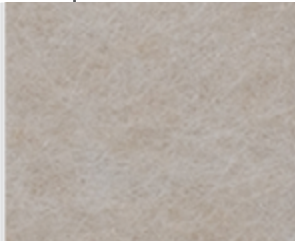



# ACOUSTIC TILES




**QUICKSHIP TERMS**  
10 DAY: Five color options, 10-day up to 200 pieces.

## OPTIONS

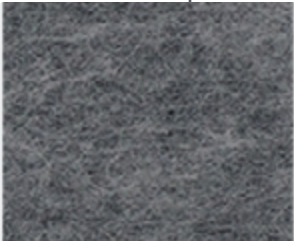
	TRUTILE DESIGNS	TRUTILE TEXTURES	TRUTILE SHAPES		
					
<b>Size</b>	2 x 2	2 x 2	2 x 2		
<b>Shape</b>	Square	Square	Gem Scallop Star		
<b>Solid Design</b>	Wide Rule Wide Arc Wide Slant Double Arc Multitrack Diamond Willow Solid	Pinwale Feathercord Lattice Grid 49 Solid	-		
<b>Mounting</b>	Surface Mount by others	Surface Mount by others	Surface Mount by others		
<b>Acoustic Panel Color</b>					
	Charcoal Gray - CHG	Shadow Gray - SDG	Silver Gray - SLG	Natural Linen - NTL	Classic White - CWH

# ACOUSTIC TILES


## TruTile Designs

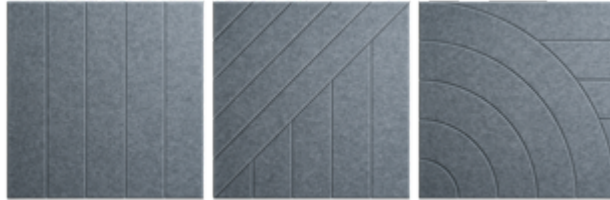

Wide Rule      Wide Slant      Wide Arc

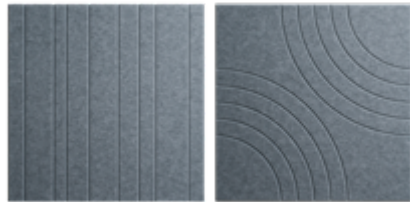

Multitrack      Double Arc

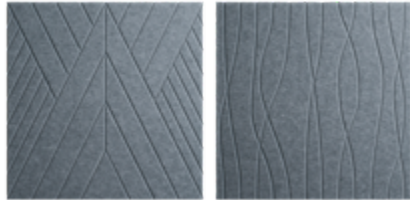


Diamond      Willow


<b>TruTile Designs</b>	—	<b>AUTT</b>
2x2 Size	—	<b>22</b>
<b>Square Shape</b>	—	<b>SQ</b>
<b>Solid Design</b>		
Wide Rule	WRL	
Wide Arc	WAC	
Wide Slant	WST	
Double Arc	DAC	
Multitrack	MTK	
Diamond	DMD	
Willow	WLO	
Solid	SD	
<b>Surface Mount by others</b>	—	<b>SM</b>
<b>Acoustic Panel Color</b>		

See previous chart for color offering

## TruTile Textures

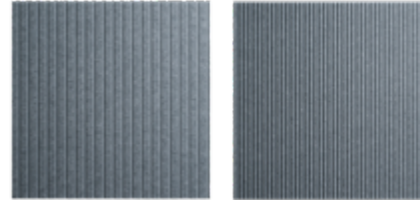

Pinwale      Feathercord

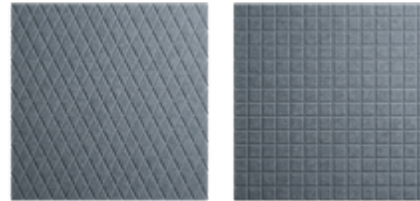

Lattice      Grid 49




Solid

<b>TruTile Textures</b>	—	<b>AUTT</b>
2x2 Size	—	<b>22</b>
<b>Square Shape</b>	—	<b>SQ</b>
<b>Solid Design</b>		
Pinwale	PWL	
Feathercord	FCD	
Lattice	LTC	
Grid 49	G49	
Solid	SD	
<b>Surface Mount by others</b>	—	<b>SM</b>
<b>Acoustic Panel Color</b>		

See previous chart for color offering

## TruTile Shapes

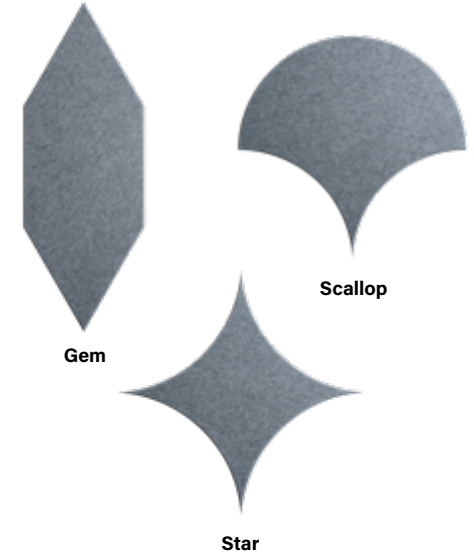

Gem

Scallop

Star

<b>TruTile Shapes</b>	—	<b>AUTT</b>
2x2 Size	—	<b>22</b>
<b>Shape</b>		
Gem	GEM	
Scallop	SCP	
Star	STR	
<b>Solid Design</b>	—	<b>SD</b>
<b>Surface Mount by others</b>	—	<b>SM</b>
<b>Acoustic Panel Color</b>		

See previous chart for color offering

# RECESSED LINEAR & PERIMETER

- Seem<sup>®</sup> 1
- Seem<sup>®</sup> 2
- Seem<sup>®</sup> 4



# RECESSED LINEAR



**QUICKSHIP TERMS**

**10 DAY:** 1000' total length.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

	SEEM 1	SEEM 2	SEEM 4
<b>OPTIONS</b>			
<b>Shielding</b>	Asymmetric Lens Batwing Lens Flush Satin Lens	Asymmetric Lens (Grid only) Batwing Lens (Grid only) Flush Satin Lens	Batwing Lens Flush Satin Lens
<b>Lumens per Foot</b>	125 - 625	125 - 625 750 - 1000 (Grid only)	275 - 1250
<b>Color Temperature</b>	80 & 90 CRI 3000K, 3500K, 4000K	80 & 90 CRI 3000K, 3500K, 4000K	80 & 90 CRI 3000K, 3500K, 4000K
<b>Voltage</b>	120/277 UNV	120/277 UNV	120/277 UNV
<b>Control System &amp; Dimming Level</b>	0-10V - 1% Dimming 0-10V - 10% Dimming	0-10V - 1% Dimming 0-10V - 10% Dimming	0-10V - 1% Dimming 0-10V - 10% Dimming
<b>Mounting</b>	Grid Tegular Slot-Tee Mud-in Trimless	Grid Tegular Slot-Tee Mud-in Trimless Trim Flange Drywall	Grid Tegular Slot-Tee Mud-in Trimless Trim Flange Drywall
<b>Factory Options</b>	Chicago Plenum Emergency Circuit Emergency Battery Flex Whip	Chicago Plenum Emergency Circuit Emergency Battery Flex Whip	Chicago Plenum Emergency Circuit Emergency Battery Flex Whip
<b>Finish</b>	Matte White	Matte White	Matte White

# RECESSED LINEAR


## Seem 1 Grid & Drywall/Hard Ceiling



Seem 1	—	FSM1
<b>Shielding</b>		
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Lens	FL	
<b>Lumen Output</b>		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot (3' minimum length.)	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Mud-in Trimless	XFF	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	_ft. _in.	<b>ft. in.</b>

(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)


## Seem 2 Drywall/Hard Ceiling

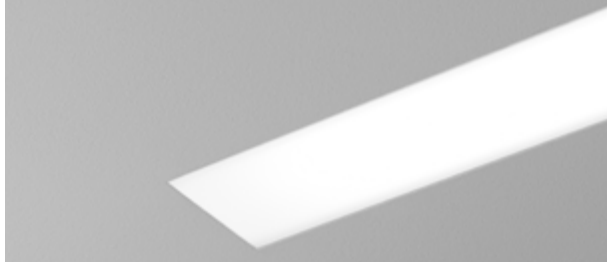

Seem 2 LED	—	FSM2L
<b>Shielding</b>		
Flush Satin Lens	FL	
<b>Lumen Output</b>		
125 Lumens per foot (LD1 & L11 only, 4' minimum.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Trim Flange Drywall	TF	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field (Mounting equipment assembled in field)	XFF	
<b>Factory Options</b>		
Chicago Plenum	CP	
(Not available with Flex Whip)		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	_ft. _in.	<b>ft. in.</b>

(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)

## Seem 2 Grid

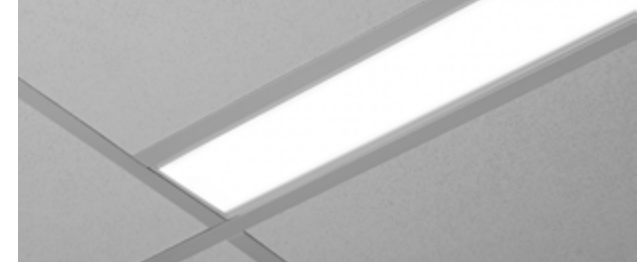

Seem 2 LED	—	FSM2L
<b>Shielding</b>		
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Satin Lens	FL	
<b>Lumen Output</b>		
125 Lumens per foot (LD1 & L11 only, 4' minimum.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
<b>Factory Options</b>		
Chicago Plenum	CP	
(Not available with Flex Whip)		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	_ft. _in.	<b>ft. in.</b>

(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)

# RECESSED LINEAR

## Seem 4 Drywall/Hard Ceiling



<b>Seem 4 LED</b>	—	<b>FSM4L</b>
<b>Shielding</b>		
Batwing Lens	BW	
Flush Satin Lens	FL	
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Trim Flange Drywall	TF	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field <small>(Mounting equipment assembled in field)</small>	XFF	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments <small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>	__ft. __in.	<b>ft. in.</b>

## Seem 4 Grid



<b>Seem 4 LED</b>	—	<b>FSM4L</b>
<b>Shielding</b>		
Batwing Lens	BW	
Flush Satin Lens	FL	
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments <small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>	__ft. __in.	<b>ft. in.</b>


# PERIMETER



## QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

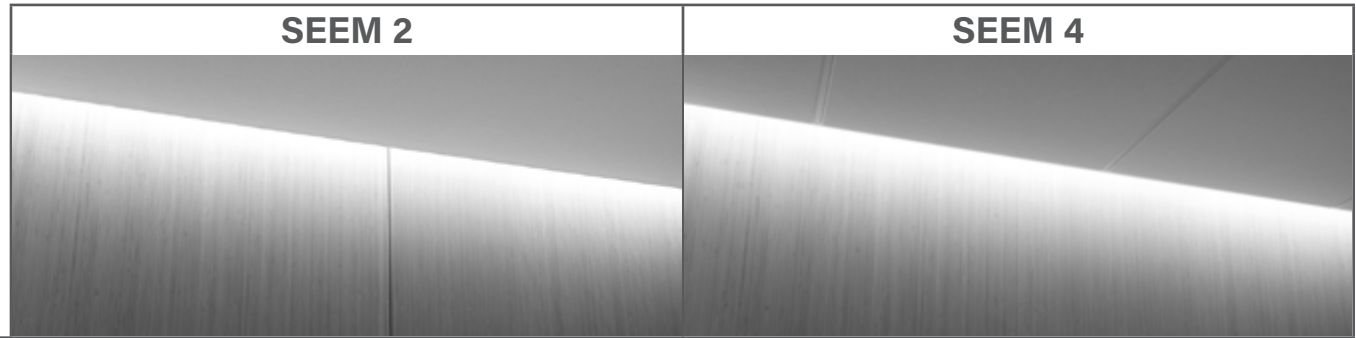

## OPTIONS

	SEEM 2	SEEM 4
<b>Housing Type</b>	Adjustable Lit Housing Fixed Housing	Adjustable Lit Housing Fixed Housing
<b>Shielding Direct</b>	Flush Lens 2.5" Regress 4.0" Regress 2.5" Regress Grazer 4.0" Regress Grazer Flush Asymmetric Room Fill	Flush Lens 2.5" Regress 4.0" Regress 2.5" Regress Grazer 4.0" Regress Grazer Flush Asymmetric Room Fill
<b>Lumens per Foot</b>	125 - 625	275 - 1000
<b>Color Temperature</b>	80 & 90 CRI 3000K, 3500K, 4000K	80 & 90 CRI 3000K, 3500K, 4000K
<b>Voltage</b>	120/277 UNV	120/277 UNV
<b>Control System &amp; Dimming Level</b>	0-10V - 1% Dimming 0-10V - 10% Dimming	0-10V - 1% Dimming 0-10V - 10% Dimming
<b>Mounting</b>	Grid Slot Tee/Tegular Trim Flange Drywall Trimless Drywall	Grid Slot Tee/Tegular Trim Flange Drywall Trimless Drywall
<b>Factory Options</b>	Chicago Plenum Emergency Circuit Emergency Battery Flex Whip	Chicago Plenum Emergency Circuit Emergency Battery Flex Whip
<b>Finish</b>	Matte White Housing	Matte White Housing

# PERIMETER

## Seem 2 Perimeter



<b>Seem 2 LED Perimeter Housing Type</b>	—	<b>FSM2PR</b>
Adjustable Lit Housing <small>(Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)</small>	ALH	_____
Fixed Housing <b>Shielding</b>	FXH	_____
Flush Lens <small>(Not available with Unlit Sliding Sleeves - SSB)</small>	FL0	_____
2.5" Regress	FL2	_____
4.0" Regress	FL4	_____
2.5" Regress Grazer	GR2	_____
4.0" Regress Grazer	GR4	_____
Flush Asymmetric Room Fill <small>(Not available with Unlit Sliding Sleeves - SSB)</small>	AF0	_____
<b>Lumen Output</b>		_____
125 Lumens per foot <small>(LD1 &amp; L11 only. 4' minimum.)</small>	125LF	_____
250 Lumens per foot	250LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
<b>Color Temperature</b>		_____
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	_____
<b>Circuit - Single Circuit</b>	—	<b>1C</b>
<b>Voltage - 120/277 UNV Volt</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		_____
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
<b>Mounting</b>		_____
Lay-in Grid	G	_____
Slot Tee / Tegular	ST	_____
Flush (FL0 & AF0)	TF	_____
Trim Flange Drywall	XFF	_____
Mud-in Trimless Drywall		_____
Regressed (FL2, FL4, GR2 & GR4)	Grid XF	_____
<b>Factory Options</b>		_____
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FN1	_____
6' New York City Flex Whip (277V)	FN2	_____
6' Flex Whip	FW	_____
Fixed Housing with Unlit Sliding Sleeves <small>(Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2, FL4, GR2 &amp; GR4 only. 3' minimum luminaire length.)</small>	SSB	_____
<b>Finish - Matte White Housing</b>	—	<b>WH</b>
<b>Luminaire Length</b>		_____
Specify luminaire/row length in 1" increments <small>(2' minimum length)</small>	_ft _in	<b>ft in</b>

## Seem 4 Perimeter



<b>Seem 4 LED Perimeter Housing Type</b>	—	<b>FSM4PR</b>
Adjustable Lit Housing <small>(Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)</small>	ALH	_____
Fixed Housing <b>Shielding</b>	FXH	_____
Flush Lens*	FL0	_____
2.5" Regress	FL2	_____
4.0" Regress	FL4	_____
Flush Grazer*	GR0	_____
2.5" Regress Grazer	GR2	_____
4.0" Regress Grazer	GR4	_____
Flush Asymmetric Room Fill* <small>*(Not available with Unlit Sliding Sleeves - SSB)</small>	AF0	_____
<b>Lumen Output</b>		_____
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
<b>Color Temperature</b>		_____
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	_____
<b>Circuit - Single Circuit</b>	—	<b>1C</b>
<b>Voltage - 120/277 UNV Volt</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		_____
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
<b>Mounting</b>		_____
Lay-in Grid	G	_____
Slot Tee / Tegular	ST	_____
Flush (FL0, GR0 & AF0)	TF	_____
Trim Flange Drywall	XFF	_____
Mud-in Trimless Drywall		_____
Regressed (FL2, FL4, GR2 & GR4)	Grid XF	_____
<b>Factory Options</b>		_____
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FN1	_____
6' New York City Flex Whip (277V)	FN2	_____
6' Flex Whip	FW	_____
Fixed Housing with Unlit Sliding Sleeves <small>(Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2, FL4, GR2 &amp; GR4 only. 3' minimum luminaire length.)</small>	SSB	_____
<b>Finish - Matte White Housing</b>	—	<b>WH</b>
<b>Luminaire Length</b>		_____
Specify luminaire/row length in 1" increments <small>(2' minimum length)</small>	_ft _in	<b>ft in</b>



# SUSPENDED, SURFACE & WALL MOUNT LINEAR

- Seem<sup>®</sup> 1
- Seem<sup>®</sup> 2
- Seem<sup>®</sup> 4






# SUSPENDED, SURFACE & WALL MOUNT LINEAR



**QUICKSHIP TERMS**

**10 DAY:** 1000' total length

**\*EC & EM:** Maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.

	SEEM 1	SEEM 2	SEEM 4
<b>OPTIONS</b>			
<b>Distribution</b>	Direct Direct/Indirect	Direct Direct/Indirect	Direct Direct/Indirect
<b>Shielding Direct</b>	Asymmetric Lens Flush Satin Lens Batwing Lens	Asymmetric Lens Flush Satin Lens Batwing Lens - (only surface mount and suspended)	Flush Satin Lens Batwing Lens - (only surface mount and suspended)
<b>Shielding Indirect</b>	Asymmetric Optic Dust Cover Batwing Optic	Asymmetric Optic Dust Cover Batwing Optic - (only surface mount and suspended)	Dust Cover Batwing Optic - (only surface mount and suspended)
<b>Lumens per Foot Direct &amp; Indirect</b>	↓ 125 - 625 ↑ 125 - 1000	↓ 125 - 1000 ↑ 250 - 1250	↓ 275 - 1250 ↑ 275 - 1250
<b>Color Temperature</b>	80 & 90 CRI 3000K, 3500K, 4000K	80 & 90 CRI 3000K, 3500K, 4000K	80 & 90 CRI 3000K, 3500K, 4000K
<b>Voltage</b>	120/277 UNV	120/277 UNV	120/277 UNV
<b>Control System &amp; Dimming Level</b>	0-10V - 1% Dimming 0-10V - 10% Dimming	0-10V - 1% Dimming 0-10V - 10% Dimming	0-10V - 1% Dimming 0-10V - 10% Dimming
<b>Mounting</b>	Cable Suspension Surface Mount	Cable Suspension Surface Mount Wall Mount	Cable Suspension Surface Mount Wall Mount
<b>Factory Options</b>	Black Cord Emergency Circuit Emergency Battery	Black Cord Emergency Circuit Emergency Battery	Black Cord Emergency Circuit Emergency Battery
<b>Finish</b>	Black White	Black White	Black White

# SUSPENDED & SURFACE MOUNT LINEAR

## Seem 1 Direct



		<b>FSM1S</b>
<b>Seem 1 Shielding</b>		_____
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Lens	FL	
<b>Lumen Output</b>		_____
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot (3' minimum length.)	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
<b>Color Temperature</b>		_____
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		_____
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		_____
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>	C96__	
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Surface Mount	SM	
<b>Factory Options</b>		_____
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Finish</b>		_____
Black	BK	
White	WH	
<b>Length</b>		<b>ft. in.</b>
Specify luminaire/row length in 1" increments <small>(2' minimum length.)</small>	__ft. __in.	

## Seem 1 Direct/Indirect



		<b>FSM1BS</b>
<b>Seem 1 Direct/Indirect Shielding</b>		_____
Asymmetric optic top / Asymmetric lens bottom	ASAS	
Asymmetric optic top / Flush lens bottom	ASFL	
Batwing optic top / Asymmetric lens bottom	BWAS	
Batwing optic top / Flush lens bottom	BWFL	
Batwing optic top / Batwing lens bottom	BWBW	
Dust cover top / Asymmetric lens bottom	DCAS	
Dust cover top / Flush lens bottom	DCFL	
Dust cover top / Batwing lens bottom	DCBW	
<b>Direct Distribution</b>		_____
125 Lumens per foot	125DN	
250 Lumens per foot	250DN	
375 Lumens per foot	375DN	
500 Lumens per foot	500DN	
625 Lumens per foot	625DN	
<b>Indirect Distribution</b>		_____
125 Lumens per foot	125UP	
250 Lumens per foot	250UP	
375 Lumens per foot	375UP	
500 Lumens per foot	500UP	
625 Lumens per foot	625UP	
800 Lumens per foot	800UP	
1000 Lumens per foot	1000UP	
<b>Color Temperature</b>		_____
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>		_____
Single Circuit	1C	
Dual Circuit	2C	
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		_____
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		_____
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.) (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>	C96__	
<b>Factory Options</b>		_____
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Finish</b>		_____
Black	BK	
White	WH	
<b>Length</b>		<b>ft. in.</b>
Specify luminaire/row length in 1" increments <small>(4' minimum length.)</small>	__ft. __in.	

# SUSPENDED, SURFACE & WALL MOUNT LINEAR

## Seem 2 Direct



## Seem 2 Wall Mount



		<b>FSM2LS</b>	
<b>Seem 2 Shielding</b>			
Asymmetric Lens	AS	_____	
Batwing Lens	BW	_____	
Flush Satin Lens	FL	_____	
<b>Lumen Output</b>			
125 Lumens per foot (4' minimum length.)	125LF	_____	
250 Lumens per foot	250LF	_____	
375 Lumens per foot	375LF	_____	
500 Lumens per foot	500LF	_____	
625 Lumens per foot	625LF	_____	
750 Lumens per foot	750LF	_____	
875 Lumens per foot	875LF	_____	
1000 Lumens per foot	1000LF	_____	
<b>Color Temperature</b>			
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	_____	
<b>Single Circuit</b>		<b>1C</b>	
<b>120/277 UNV Voltage</b>		<b>UNV</b>	
<b>Control System &amp; Dimming Level</b>			
0-10V - 1% Dimming	L11	_____	
0-10V - 10% Dimming	LD1	_____	
<b>Mounting</b>			
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.) (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)	C96__	_____	
Surface Mount	SM	_____	
<b>Factory Options</b>			
Black Cord	BKCD	_____	
Emergency Circuit*	_EC	_____	
Emergency Battery Pack*	_EM	_____	
<b>Finish</b>			
Black	BK	_____	
White	WH	_____	
<b>Length</b>			
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	_____	

		<b>FSM2LW</b>	
<b>Seem 2 Wall Mount Shielding</b>			
Asymmetric Lens	AS	_____	
Flush Satin Lens	FL	_____	
<b>Lumen Output</b>			
125 Lumens per foot (4' minimum length.)	125LF	_____	
250 Lumens per foot	250LF	_____	
375 Lumens per foot	375LF	_____	
500 Lumens per foot	500LF	_____	
625 Lumens per foot	625LF	_____	
750 Lumens per foot	750LF	_____	
875 Lumens per foot	875LF	_____	
1000 Lumens per foot	1000LF	_____	
<b>Color Temperature</b>			
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	_____	
<b>Single Circuit</b>		<b>1C</b>	
<b>120/277 UNV Voltage</b>		<b>UNV</b>	
<b>Control System &amp; Dimming Level</b>			
0-10V - 1% Dimming	L11	_____	
0-10V - 10% Dimming	LD1	_____	
<b>Wall Mount</b>			
<b>Factory Options</b>			
Emergency Circuit*	_EC	_____	
Emergency Battery Pack*	_EM	_____	
<b>Finish</b>			
Black	BK	_____	
White	WH	_____	
<b>Length</b>			
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	_____	

# SUSPENDED & WALL MOUNT LINEAR

## Seem 2 Direct/Indirect



<b>Seem 2 Direct/Indirect</b>	<b>FSM2BS</b>
<b>Shielding</b>	
Asymmetric optic top / Asymmetric lens bottom	ASAS
Asymmetric optic top / Flush lens bottom	ASFL
Batwing optic top / Asymmetric lens bottom	BWAS
Batwing optic top / Batwing lens bottom	BWBW
Batwing optic top / Flush lens bottom	BWFL
Dust cover top / Asymmetric lens bottom	DCAS
Dust cover top / Batwing lens bottom	DCBW
Dust cover top / Flush lens bottom	DCFL
<b>Direct Distribution</b>	
125 Lumens per foot	125DN
250 Lumens per foot	250DN
375 Lumens per foot	375DN
500 Lumens per foot	500DN
625 Lumens per foot	625DN
750 Lumens per foot	750DN
875 Lumens per foot	875DN
1000 Lumens per foot	1000DN
<b>Indirect Distribution</b>	
250 Lumens per foot	250UP
375 Lumens per foot	375UP
500 Lumens per foot	500UP
625 Lumens per foot	625UP
750 Lumens per foot	750UP
875 Lumens per foot	875UP
1000 Lumens per foot	1000UP
1250 Lumens per foot	1250UP
<b>Color Temperature</b>	
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K
<b>Single Circuit</b>	
Single Circuit	1C
Dual Circuit	2C
<b>120/277 UNV Voltage</b>	— <b>UNV</b>
<b>Control System &amp; Dimming Level</b>	
0-10V - 1% Dimming	L11
0-10V - 10% Dimming	LD1
<b>Mounting</b>	
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>	C96__
<small>(Specify one of the following in place of "C" - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>	
<b>Factory Options</b>	
Black Cord	BKCD
Emergency Circuit*	_EC
Emergency Battery Pack*	_EM
<b>Finish</b>	
Black	BK
White	WH
<b>Length</b>	
Specify luminaire/row length in 1' increments <small>(4' minimum length.)</small>	X'

## Seem 2 Direct/Indirect Wall Mount



<b>Seem 2 Direct/Indirect Wall Mount</b>	<b>FSM2BW</b>
<b>Shielding</b>	
Asymmetric optic top / Asymmetric lens bottom	ASAS
Asymmetric optic top / Flush lens bottom	ASFL
Dust cover top / Asymmetric lens bottom	DCAS
Dust cover top / Flush lens bottom	DCFL
<b>Direct Distribution</b>	
125 Lumens per foot	125DN
250 Lumens per foot	250DN
375 Lumens per foot	375DN
500 Lumens per foot	500DN
625 Lumens per foot	625DN
750 Lumens per foot	750DN
875 Lumens per foot	875DN
1000 Lumens per foot	1000DN
<b>Indirect Distribution</b>	
250 Lumens per foot	250UP
375 Lumens per foot	375UP
500 Lumens per foot	500UP
625 Lumens per foot	625UP
750 Lumens per foot	750UP
875 Lumens per foot	875UP
1000 Lumens per foot	1000UP
1250 Lumens per foot	1250UP
<b>Color Temperature</b>	
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K
<b>Single Circuit</b>	
Single Circuit	1C
Dual Circuit	2C
<b>120/277 UNV Voltage</b>	— <b>UNV</b>
<b>Control System &amp; Dimming Level</b>	
0-10V - 1% Dimming	L11
0-10V - 10% Dimming	LD1
<b>Wall Mount</b>	— <b>WM</b>
<b>Factory Options</b>	
Emergency Circuit*	_EC
Emergency Battery Pack*	_EM
<b>Finish</b>	
Black	BK
White	WH
<b>Length</b>	
Specify luminaire/row length in 1' increments <small>(4' minimum length.)</small>	X'

# SUSPENDED, SURFACE & WALL MOUNT LINEAR

## Seem 4 Direct



<b>Seem 4 LED</b>		<b>FSM4LS</b>
<b>Shielding</b>		
Batwing Lens	BW	
Flush Satin Lens	FL	
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.) (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>	C96__	
Surface Mount	SM	
<b>Factory Options</b>		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Finish</b>		
Black	BK	
White	WH	
<b>Length</b>		
Specify luminaire/row length in 1' increments	X'	

## Seem 4 Wall Mount



<b>Seem 4 LED Wall Mount</b>		<b>FSM4LW</b>
<b>Shielding: Flush Satin Lens</b>	—	<b>FL</b>
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Wall Mount</b>	—	<b>WM</b>
<b>Factory Options</b>		
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
<b>Finish</b>		
Black	BK	
White	WH	
<b>Length</b>		
Specify luminaire/row length in 1' increments <small>(2' minimum length.)</small>	X'	

# SUSPENDED & WALL MOUNT LINEAR

## Seem 4 Direct/Indirect



<b>Seem 4 Direct/Indirect Shielding</b>		<b>FSM4BS</b>
Batwing optic top / Batwing lens bottom	BWBW	_____
Batwing optic top / Flush lens bottom	BWFL	_____
Flush lens top / Batwing lens bottom	FLBW	_____
Flush lens top / Flush lens bottom	FLFL	_____
<b>Direct Distribution</b>		
275 Lumens per foot	275DN	_____
375 Lumens per foot	375DN	_____
625 Lumens per foot	625DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
1125 Lumens per foot	1125DN	_____
1250 Lumens per foot	1250DN	_____
<b>Indirect Distribution</b>		
275 Lumens per foot	275UP	_____
375 Lumens per foot	375UP	_____
625 Lumens per foot	625UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1125 Lumens per foot	1125UP	_____
1250 Lumens per foot	1250UP	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	_____
<b>Single Circuit</b>		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<small>(Multiple feeds required for 0-10V drivers)</small>		
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.) (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>	C96__	_____
<b>Factory Options</b>		
Black Cord	BKCD	_____
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1' increments	X'	_____

## Seem 4 Direct/Indirect Wall Mount



<b>Seem 4 Direct/Indirect Wall Mount Shielding</b>		<b>FSM4BW</b>
Flush lens top / Flush lens bottom	FLFL	_____
<b>Direct Distribution</b>		
275 Lumens per foot	275DN	_____
375 Lumens per foot	375DN	_____
625 Lumens per foot	625DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
1250 Lumens per foot	1250DN	_____
<b>Indirect Distribution</b>		
275 Lumens per foot	275UP	_____
375 Lumens per foot	375UP	_____
625 Lumens per foot	625UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1250 Lumens per foot	1250UP	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	_____
<b>Single Circuit</b>		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<small>(Multiple feeds required for 0-10V drivers)</small>		
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Wall Mount</b>	—	<b>WM</b>
<b>Factory Options</b>		
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1' increments	X'	_____

# ID+ DOWNLIGHTS & CYLINDERS

- 3.5"
- 4.5"
- 3.5" x 3.5"
- 4.5" x 4.5"





# ID+ DOWNLIGHTS




**QUICKSHIP TERMS**

**5 DAY:** Downlights 200 pieces or less

**10 DAY:** Wall Wash 100 pieces or less

**\*\*10 DAY:** Downlights with emergency Battery - EM, EMR, LC4EM and LC44EM

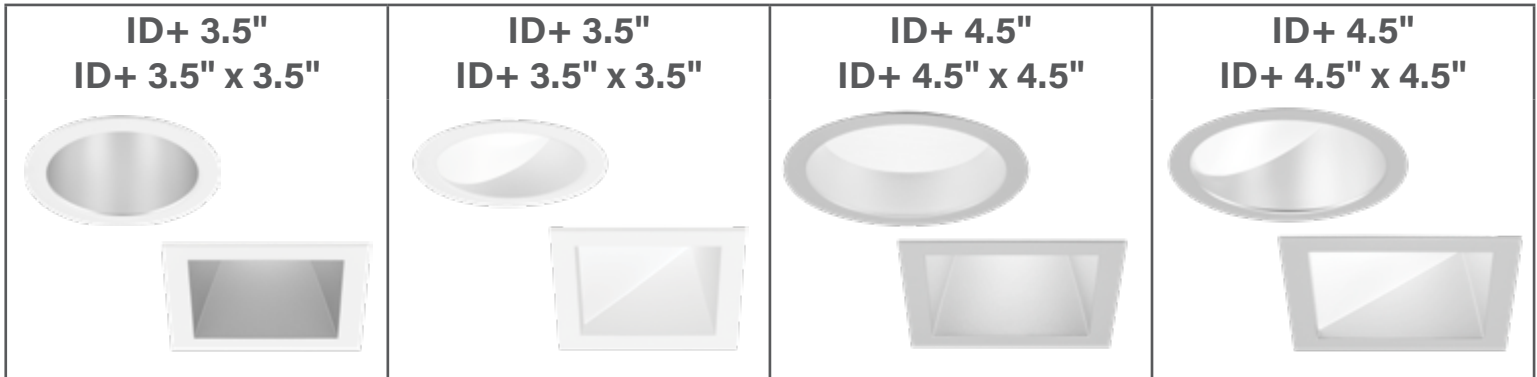

**OPTIONS**

	<b>ID+ 3.5" ID+ 3.5" x 3.5"</b>	<b>ID+ 3.5" ID+ 3.5" x 3.5"</b>	<b>ID+ 4.5" ID+ 4.5" x 4.5"</b>	<b>ID+ 4.5" ID+ 4.5" x 4.5"</b>
<b>Distribution</b>	Downlight	Wall Wash	Downlight	Wall Wash
<b>Trim Type</b>	Round Overlap Round Trimless Square Die-Cast Overlap Square Die-Cast Trimless	Round Overlap Round Trimless Square Die-Cast Overlap Square Die-Cast Trimless	Round Overlap Round Trimless Square Die-Cast Overlap Square Die-Cast Trimless	Round Overlap Round Trimless Square Die-Cast Overlap Square Die-Cast Trimless
<b>Color Options</b>	Standard White 80 & 90 CRI	Standard White 80 & 90 CRI	Standard White 80 & 90 CRI	Standard White 80 & 90 CRI
<b>Lumen Output</b>	700 - 2100	Round: 700 - 2100 Square: 700 - 1500	1000 - 3000	1000 - 2500
<b>Voltage</b>	120/277 UNV, 120 V, 277 V	120/277 UNV, 120 V, 277 V	120/277 UNV, 120 V, 277 V	120/277 UNV, 120 V, 277 V
<b>Control System &amp; Dimming Level</b>	0-10V - 1% Dimming 0-10V - 10% Dimming Forward Phase (120V only)	0-10V - 1% Dimming 0-10V - 10% Dimming Forward Phase (120V only)	0-10V - 1% Dimming 0-10V - 10% Dimming Forward Phase (120V only)	0-10V - 1% Dimming 0-10V - 10% Dimming Forward Phase (120V only)
<b>Color Temperature</b>	80 & 90 CRI 2700K, 3000K, 3500K, 4000K	80 & 90 CRI 2700K, 3000K, 3500K, 4000K	80 & 90 CRI 2700K, 3000K, 3500K, 4000K	80 & 90 CRI 2700K, 3000K, 3500K, 4000K
<b>Optic</b>	Tall Cone with 50° cut-off Short Cone with 60° cut-off	Short Cone with 60° cut-off	Downlight with 50° cut-off Super Short Cone with Solite Lens 75° cut-off	Short Cone with 60° cut-off
<b>Distribution</b>	Narrow Flood 28° - Very Wide Flood 89°	-	Narrow Flood 26° - Very Wide Flood 98°	-
<b>Factory Options</b>	Bar Hangers Chicago Plenum **Emergency Battery with Remote Test Switch	Bar Hangers Chicago Plenum	Bar Hangers Chicago Plenum / National Plenum **Emergency Battery	Bar Hangers Chicago Plenum / National Plenum
<b>Finish</b>	Clear Diffuse White	Clear Diffuse White	Clear Diffuse White	Clear Diffuse White

# ID+ DOWNLIGHTS

## ID+ 3.5" Downlight



<b>HOUSING</b>	<b>ID+ 3.5" Downlight</b>	—	<b>FLC3D</b>
	<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen (Not available with LFP)	700L	
	900 Lumen (Not available with LFP)	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Voltage</b>		
	120/270 Volt	UNV	
<small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>			
	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC / Airtight	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
	Emergency Battery with Remote Test Switch**	EMR	
<small>(T-rated housing only. Above ceiling access required.)</small>			
<b>TRIM &amp; LED</b>	<b>Aperture: 3.5" Round Reflector</b>	—	<b>LC3</b>
	<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic</b>		
	Tall Cone with 50° cut-off	DNT	
	Short Cone with 60° cut-off	DNS	
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	Very Wide Flood	VWFL	
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	
	<b>Optional Flange Finish</b>		
	<small>(CD finish only. For matching finishes leave blank)</small>		
	White Painted	WP	

\*\*10 DAY

## ID+ 3.5" Wall Wash



<b>HOUSING</b>	<b>ID+ 3.5" Wall Wash</b>	—	<b>FLC3W</b>
	<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen (Not available with LFP)	700L	
	900 Lumen (Not available with LFP)	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Voltage</b>		
	120/270 Volt	UNV	
<small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>			
	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	3.5" Round Reflector	LC3	
	3.5" Round Airtight Reflector	LC3AT	
	<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Short Cone with 60° cut-off</b>	—	<b>WWS</b>
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	
	<b>Optional Flange Finish</b>		
	<small>(CD finish only. For matching finishes leave blank)</small>		
	White Painted	WP	

# ID+ DOWNLIGHTS

## ID+ 3.5" Downlight Trimless



<b>HOUSING</b>	<b>ID+ 3.5" Downlight</b>	—	<b>FLC3D</b>
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen (Not available with LFP)	700L	
	900 Lumen (Not available with LFP)	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Voltage</b>		
	120/270 Volt	UNV	
<small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>			
	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC / Airtight	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture: 3.5" Round Reflector</b>	—	<b>LC3</b>
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic</b>		
	Tall Cone with 50° cut-off	DNT	
	Short Cone with 60° cut-off	DNS	
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	

## ID+ 3.5" Wall Wash Trimless



<b>HOUSING</b>	<b>ID+ 3.5" Wall Wash</b>	—	<b>FLC3W</b>
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen (Not available with LFP)	700L	
	900 Lumen (Not available with LFP)	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Voltage</b>		
	120/270 Volt	UNV	
<small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>			
	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	3.5" Round Reflector	LC3	
	3.5" Round Airtight Reflector	LC3AT	
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Short Cone with 60° cut-off</b>	—	<b>WWS</b>
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	

# ID+ DOWNLIGHTS

## ID+ 3.5" x 3.5" Downlight



<b>HOUSING</b>	<b>ID+ 3.5"x3.5" Downlight</b>	—	<b>FLC33D</b>
	<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen (Not available with LFP)	700L	
	900 Lumen (Not available with LFP)	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Voltage</b>		
	120/270 Volt	UNV	
	<small>(IC-rated housing: SW - 1700lm max.T-rated housing: SW - 1100lm max.)</small>		
	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC / Airtight	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
	Emergency Battery with Remote Test Switch**	EMR	
	<small>(T-rated housing only. Above ceiling access required.)</small>		
<b>TRIM &amp; LED</b>	<b>Aperture: 3.5" Square Reflector</b>	—	<b>LC33</b>
	<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic</b>		
	Tall Cone with 50° cut-off	DNT	
	Short Cone with 60° cut-off	DNS	
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	Very Wide Flood	VWFL	
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	
	<b>Optional Flange Finish</b>		
	<small>(CD finish only. For matching finishes leave blank)</small>		
	White Painted	WP	

## ID+ 3.5" x 3.5" Wall Wash




<b>HOUSING</b>	<b>ID+ 3.5"x3.5" Wall Wash</b>	—	<b>FLC33W</b>
	<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	<b>Voltage</b>		
	120/270 Volt	UNV	
	<small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 700lm max.)</small>		
	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	3.5" Square Reflector	LC33	
	3.5" Square Airtight Reflector	LC33AT	
	<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Short Cone with 60° cut-off</b>	—	<b>WWS</b>
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	
	<b>Optional Flange Finish</b>		
	<small>(CD finish only. For matching finishes leave blank)</small>		
	White Painted	WP	

\*\*10 DAY

# ID+ DOWNLIGHTS

## ID+ 3.5" x 3.5" Downlight Trimless



<b>HOUSING</b>	<b>ID+ 3.5"x3.5" Downlight</b>	—	<b>FLC33D</b>
	<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen (Not available with LFP)	700L	
	900 Lumen (Not available with LFP)	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Voltage</b>		
	120/270 Volt	UNV	
<small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC / Airtight	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture: 3.5" Square Reflector</b>	—	<b>LC33</b>
	<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	1700 Lumen	1700L	
	1900 Lumen	1900L	
	2100 Lumen	2100L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic</b>		
	Tall Cone with 50° cut-off	DNT	
	Short Cone with 60° cut-off	DNS	
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	Very Wide Flood	VWFL	
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	

## ID+ 3.5" x 3.5" Wall Wash Trimless



<b>HOUSING</b>	<b>ID+ 3.5"x3.5" Wall Wash</b>	—	<b>FLC33W</b>
	<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	<b>Voltage</b>		
	120/270 Volt <small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 700lm max.)</small>	UNV	
	120V (T-rated housing only)	120	
	277V (T-rated housing only)	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	Thermally Protected, Non-IC	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	3.5" Square Reflector	LC33	
	3.5" Square Airtight Reflector	LC33AT	
	<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
	700 Lumen	700L	
	900 Lumen	900L	
	1100 Lumen	1100L	
	1300 Lumen	1300L	
	1500 Lumen	1500L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Short Cone with 60° cut-off</b>	—	<b>WWS</b>
	<b>Finish</b>		
	Clear Diffuse	CD	
	White	WH	

# ID+ DOWNLIGHTS

## ID+ 4.5" Downlight



<b>HOUSING</b>	<b>ID+ 4.5" Downlight</b>	—	<b>FLC4D</b>
	<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution or LFP.)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	<small>(L11 &amp; LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)</small>		
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
	Emergency Battery**	EM	
	<small>(Must order LC4EM trim. Not wet location or outdoor rated.)</small>		
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Round Reflector	LC4	
	4.5" Round Reflector - Emergency**	LC4EM	
	<small>(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)</small>		
	<b>Trim Type: Round</b>	—	<b>RO</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution.)</small>		
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Downlight with 50° cut-off</b>	—	<b>DN</b>
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood 1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	<b>Reflector Color</b>		
	Clear Diffuse	CD	
	White (White Painted flange only)	WH	
	<b>Flange Finish</b>		
	Non-Painted (Clear Diffuse only)	NP	
	White Painted	WP	

## ID+ 4.5" Wall Wash



<b>HOUSING</b>	<b>ID+ 4.5" Downlight</b>	—	<b>FLC4W</b>
	<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with LFP.)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	<small>(L11 &amp; LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)</small>		
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Round Reflector	LC4	
	<b>Trim Type: Round</b>	—	<b>RO</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Wall Wash</b>	—	<b>WW</b>
	<b>Reflector Color</b>		
	Clear Diffuse	CD	
	White (White Painted flange only)	WH	
	<b>Flange Finish</b>		
	Non-Painted (Clear Diffuse only)	NP	
	White Painted	WP	

\*\*10 DAY

# ID+ DOWNLIGHTS

## ID+ 4.5" Downlight Trimless



<b>HOUSING</b>	<b>ID+ 4.5" Trimless Downlight</b>	—	<b>FLC4D</b>
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution or LFP)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	<small>(L11 &amp; LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)</small>		
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
	Emergency Battery**	EM	
	<small>(Must order LC4EM trim. Not wet location or outdoor rated.)</small>		
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Round Reflector	LC4	
	4.5" Round Reflector - Emergency**	LC4EM	
	<small>(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)</small>		
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution)</small>		
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Downlight with 50° cut-off</b>	—	<b>DN</b>
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood 1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	<b>Reflector Color</b>		
	Clear Diffuse	CD	
	White	WH	

## ID+ 4.5" Wall Wash Trimless



<b>HOUSING</b>	<b>ID+ 4.5" Trimless Wall Wash</b>	—	<b>FLC4W</b>
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with LFP)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	<small>(L11 &amp; LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)</small>		
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Round Reflector	LC4	
	<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Wall Wash Reflector Color</b>	—	<b>WW</b>
	Clear Diffuse	CD	
	White	WH	

# ID+ DOWNLIGHTS

## ID+ 4.5" x 4.5" Downlight



<b>HOUSING</b>	<b>ID+ 4.5" x 4.5" Downlight</b>	—	<b>FLC44D</b>
	<b>Trim Type: Square Overlap</b>	—	<b>SO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution or LFP)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight <small>(L11 &amp; LD1 2000L max. LFP 1500L max. LC44AT required for Airtight.)</small>	IC	
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
	Emergency Battery**	EM	
	<small>(Must order LC44EM trim. Not wet location or outdoor rated.)</small>		
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Square Reflector	LC44	
	4.5" Square Reflector - Emergency** <small>(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)</small>	LC44EM	
	<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
	<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution.)</small>		
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Downlight with 50° cut-off</b>	—	<b>DN</b>
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood 1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	Very Wide Flood	VWFL	
	<b>Reflector Color</b>		
	Clear Diffuse	CD	
	White (White Painted flange only)	WH	
	<b>Flange Finish</b>		
	Non-Painted (Clear Diffuse only)	NP	
	White Painted	WP	

## ID+ 4.5" x 4.5" Wall Wash




<b>HOUSING</b>	<b>ID+ 4.5" x 4.5" Wall Wash</b>	—	<b>FLC44W</b>
	<b>Trim Type: Square Overlap</b>	—	<b>SO</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	<small>(Not available with LFP.)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight <small>(L11 &amp; LD1 1500L max. LFP 1000L max. LC44AT required for Airtight.)</small>	IC	
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Square Reflector	LC44	
	<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
	<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Wall Wash</b>	—	<b>WW</b>
	<b>Reflector Color</b>		
	Clear Diffuse	CD	
	White (White Painted flange only)	WH	
	<b>Flange Finish</b>		
	Non-Painted (Clear Diffuse only)	NP	
	White Painted	WP	



# ID+ DOWNLIGHTS

## ID+ 4.5" x 4.5" Downlight Trimless



<b>HOUSING</b>	<b>ID+ 4.5" x 4.5" Downlight</b>	—	<b>FLC44D</b>
	<b>Trim Type: Square Trimless</b>	—	<b>ST</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution or LFP.)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	<small>(L11 &amp; LD1 2000L max. LFP 1500L max. LC44AT required for Airtight.)</small>		
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
	Emergency Battery**	EM	
	<small>(Must order LC44EM trim. Not wet location or outdoor rated.)</small>		
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Square Reflector	LC44	
	4.5" Square Reflector - Emergency**	LC4EM	
	<small>(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)</small>		
	<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	<small>(Not available with SP distribution.)</small>		
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Downlight with 50° cut-off</b>	—	<b>DN</b>
	<b>Distribution</b>		
	Narrow Flood	NFL	
	Flood 1	FL1	
	Flood 2	FL2	
	Wide Flood	WFL	
	Very Wide Flood	VWFL	
	<b>Reflector Color</b>		
	Clear Diffuse	CD	
	White	WH	

\*\*10 DAY

## ID+ 4.5" x 4.5" Wall Wash Trimless



<b>HOUSING</b>	<b>ID+ 4.5" x 4.5" Wall Wash</b>	—	<b>FLC44W</b>
	<b>Trim Type: Square Trimless</b>	—	<b>ST</b>
	<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
	<b>Lumen Output</b>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	<small>(Not available with LFP.)</small>		
	<b>Voltage</b>		
	UNV 120V/277V	UNV	
	<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
	120V	120	
	277V	277	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Forward Phase (120V only)	LFP	
	<b>Housing Type</b>		
	IC Rated / Airtight	IC	
	<small>(L11 &amp; LD1 1500L max. LFP 1000L max. LC44AT required for Airtight.)</small>		
	Thermally Protected	T	
	<b>Factory Options</b>		
	Bar Hangers	BH	
	Chicago Plenum / National Plenum	CP	
<b>TRIM &amp; LED</b>	<b>Aperture</b>		
	4.5" Square Reflector	LC44	
	<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
	<b>Lumen Output</b>		
	<small>(Trim &amp; housing output must match)</small>		
	1000 Lumens	1000L	
	1500 Lumens	1500L	
	2000 Lumens	2000L	
	2500 Lumens	2500L	
	<b>Color Temperature</b>		
	2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
	3000K, 80 +CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Optic: Wall Wash</b>	—	<b>WW</b>
	<b>Reflector Color</b>		
	Clear Diffuse	CD	
	White	WH	

# ID+ CYLINDERS



**QUICKSHIP TERMS**  
10 DAY: 50 pieces or less  
(FLCY3 & FLCY4)  
100 pieces or less  
(FLCY3N)

## OPTIONS

	<b>ID+ 3.5" PURE</b> 	<b>ID+ 3.5"</b> 	<b>ID+ 4.5"</b> 
<b>Distribution</b>	Pendant Surface Mount	Pendant Surface Mount	Pendant Surface Mount
<b>Decorative Reveal</b>	-	White Non-Glow Reveal Black Non-Glow Reveal White Glowing Reveal	White Non-Glow Reveal Black Non-Glow Reveal White Glowing Reveal
<b>Lumen Output</b>	700 - 1900 Pendant 700 - 1700 Surface Mount	700 - 2000	1000 - 3000
<b>Voltage</b>	120/277 UNV, 120 V, 277 V	120/277 UNV, 120 V, 277 V	120/277 UNV, 120 V, 277 V
<b>Control System &amp; Dimming Level</b>	0-10V - 1% Dimming Phase Dimming	0-10V - 1% Dimming Forward Phase - 1% Dimming	0-10V - 1% Dimming Forward Phase - 1% Dimming
<b>Color Temperature</b>	80 & 90 CRI 2700K, 3000K, 3500K, 4000K	80 & 90 CRI 2700K, 3000K, 3500K, 4000K	80 & 90 CRI 2700K, 3000K, 3500K, 4000K
<b>Mounting</b>	Cable Suspension Surface Mount	Cable Suspension Surface Mount	Cable Suspension Surface Mount
<b>Optic</b>	50° Cut-off Cone 60° Cut-off Cone 75° Cut-off Cone	50° Cut-off Cone 50° Cut-off Cone with Solite Lens 80° Cut-off Cone	50° Cut-off Cone 50° Cut-off Cone with Solite Lens 80° Cut-off Cone
<b>Distribution</b>	Narrow Flood 25° - Super Wide Flood 91°	Narrow Flood 28° - Super Wide Flood 89°	Narrow Flood 26° - Super Wide Flood 98°
<b>Factory Options</b>	Emergency Battery	Emergency Battery	Emergency Battery
<b>Reflector Color</b>	Clear Diffuse White	Clear Diffuse	Clear Diffuse
<b>Finish</b>	Black White	Black White	Black White



## ID+ 3.5" Pure Cylinder Surface Mount



<b>ID+ 3.5" Pure Cylinder Surface Mount</b>		<b>FLCY3N</b>
<b>Trim Type: Round</b>		<b>RD</b>
<b>Housing Height: 7"</b>		<b>7H</b>
<b>Direct Lumen Output</b>		
700 Lumens	700DN	
900 Lumens	900DN	
1100 Lumens	1100DN	
1300 Lumens	1300DN	
1500 Lumens	1500DN	
1700 Lumens	1700DN	
<b>Color Temperature</b>		
<small>(Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI.)</small>		
2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Circuits</b>		<b>1C</b>
Single Circuit	1C	
<b>Voltage</b>		
UNV 120/277 Volt	UNV	
120 Volt	120	
277 Volt	277	
<b>Canopy Configuration</b>		
Shallow Canopy, Integral Driver	SC	
<b>Canopy Color</b>		
Matte Black	BK	
Matte White	WH	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
Phase Dimming	LFP	
<b>Mounting</b>		<b>SM</b>
Surface Mount		
<b>Direct Optic</b>		
50° cut-off cone	DNT	
60° cut-off cone	DNS	
75° cut-off cone with Solite Lens	DSS	
<b>Direct Distribution</b>		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood (DSS only)	VWFL	
Super Wide Flood (DSS only)	SWFL	
<b>Reflector Color</b>		
Clear Diffuse	CD	
White	WH	
<b>Luminaire Finish</b>		
Black	BK	
White	WH	

## ID+ 3.5" Cylinder Surface Mount



<b>ID+ 3.5" Round Cylinder Surface Mount</b>	—	<b>FLCY3</b>
<b>Trim Type: Round</b>	—	<b>RD</b>
<b>Decorative Reveal</b>		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
<b>Lumen Output</b>		
700 Lumens	700L	
1000 Lumens	1000L	
1500 Lumens	1500L	
1700 Lumens	1700L	
2000 Lumens <small>(Power Canopy only)</small>	2000L	
<b>Color Temperature</b>		
2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>		<b>1C</b>
	—	
<b>Voltage</b>		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
<b>Canopy Configuration</b>		
Shallow Canopy, Integral Driver <small>(L11 &amp; LFP only)</small>	SC	
Power Canopy	PC	
<b>Dimming Level</b>		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming <small>(Shallow Canopy, Integral Driver, 120V only)</small>	LFP	
<b>Mounting: Surface Mount</b>		<b>SM</b>
	—	
<b>Optic</b>		
50° Cut-off Cone <small>(Not available with SWFL distribution)</small>	DNT	
50° Cut-off Cone with Solite Lens <small>(NFL distribution only)</small>	DNTS	
80° Cut-off Cone <small>(SWFL distribution only)</small>	DSS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Super Wide Flood	SWFL	
<b>Factory Options</b>		
Emergency Battery <small>(J-box cannot be recessed above the ceiling, Remote test switch.)</small>	EMR	
<b>Reflector Color: Clear Diffuse</b>		<b>CD</b>
	—	
<b>Luminaire Finish</b>		
Black with Black cord	BK	
White with White cord	WH	

## ID+ 4.5" Cylinder Surface Mount



<b>ID+ 4.5" Round Cylinder Surface Mount</b>	—	<b>FLCY4</b>
<b>Trim Type: Round</b>	—	<b>RD</b>
<b>Decorative Reveal</b>		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens <small>(Power Canopy only)</small>	3000L	
<b>Color Temperature</b>		
2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>		<b>1C</b>
	—	
<b>Voltage</b>		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
<b>Canopy Configuration</b>		
Shallow Canopy, Integral Driver	SC	
Power Canopy	PC	
<b>Dimming Level</b>		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming <small>(120V only)</small>	LFP	
<b>Mounting: Surface Mount</b>		<b>SM</b>
	—	
<b>Optic</b>		
50° Cut-off Cone <small>(Not available with SWFL distribution)</small>	DNT	
50° Cut-off Cone with Solite Lens <small>(NFL distribution only)</small>	DNTS	
80° Cut-off Cone <small>(SWFL distribution only)</small>	DSS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood	FL	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Super Wide Flood	SWFL	
<b>Factory Options</b>		
Emergency Battery <small>(J-box cannot be recessed above the ceiling, Remote test switch.)</small>	EMR	
<b>Reflector Color: Clear Diffuse</b>		<b>CD</b>
	—	
<b>Luminaire Finish</b>		
Black with Black cord	BK	
White with White cord	WH	

# ARCHITECTURAL TROFFERS

- Amica<sup>®</sup> 2
- Equation<sup>®</sup> 2
- Luna<sup>®</sup> LED



# ARCHITECTURAL TROFFERS



**QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**\*\*10 DAY:** 300 pieces or less  
**†10 DAY:** EM Battery

	AMICA 2	EQUATION 2	LUNA LED
			
<b>OPTIONS</b>			
<b>Nominal Size</b>	1' x 2' 1' x 4' 2' x 2' 2' x 4'	1' x 4' 2' x 2' 2' x 4'	2' x 2' 2' x 4'
<b>Shielding</b>	Ribbed Acrylic Diffuser	Opal Acrylic Lens MicroGlow Prismatic Lens	Perforated Shield
<b>Lumen Output</b>	Standard: 2000 - 7500 High Efficiency: 2000LH - 6500LH	Standard: 2000 - 5500 High Efficiency: 2500LH - 6500LH	2000 - 7000
<b>Voltage</b>	120/277 UNV	120/277 UNV	120/277 UNV
<b>Control System &amp; Dimming Level</b>	0-10V - 1% Dimming 0-10V - 10% Dimming	0-10V - 1% Dimming 0-10V - 10% Dimming	0-10V - 1% Dimming 0-10V - 10% Dimming
<b>Color Temperature</b>	80 & 90 CRI 3000K, 3500K, 4000K	80 & 90 CRI 3000K, 3500K, 4000K	80 & 90 CRI 3000K, 3500K, 4000K
<b>Mounting</b>	Grid Drywall Frame Kit	Grid Slot Tee Drywall Frame Kit Surface Mount	Grid Slot Tee Drywall Frame Kit
<b>Factory Options</b>	Chicago Plenum Emergency Battery† Flex Whip	Chicago Plenum Emergency Battery† Flex Whip	Chicago Plenum Emergency Battery† Positional Clips Flex Whip
<b>Finish</b>	Matte White	Matte White	Matte White


# ARCHITECTURAL TROFFERS

Amica 2 1' x 2' | 2' x 2'



	<b>Amica 2</b>	—	<b>FAM2</b>
	<b>Nominal Size</b>		
	1' x 2'	12	
	2' x 2'	22	
	<b>Shielding: Ribbed Acrylic Diffuser</b>	—	<b>ACR</b>
	<b>Lumen Output</b>		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	3500 Lumens	3500L	
	4000 Lumens	4000L	
High Efficiency	2000 Lumens	2000LH	
	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
	<b>Mounting</b>		
	Grid	G	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Chicago Plenum	CP	
	Emergency Battery Pack <sup>1</sup> with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte White Finish</b>	—	<b>WH</b>

Amica 2 1' x 4' | 2' x 4'



	<b>Amica 2</b>	—	<b>FAM2</b>
	<b>Nominal Size</b>		
	1' x 4'	14	
	2' x 4'	24	
	<b>Shielding: Ribbed Acrylic Diffuser</b>	—	<b>ACR</b>
	<b>Lumen Output</b>		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	6000 Lumens	6000L	
	6500 Lumens	6500L	
	7000 Lumens	7000L	
High Efficiency	7500 Lumens	7500L	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	6500 Lumens	6500LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
	<b>Mounting</b>		
	Grid	G	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Chicago Plenum	CP	
	Emergency Battery Pack <sup>1</sup> with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte White Finish</b>	—	<b>WH</b>

# ARCHITECTURAL TROFFERS

Equation 2 1' x 4'



<b>Equation 2</b>	—	<b>FEQ2</b>
<b>Nominal Size: 1' x 4'</b>	—	<b>14</b>
<b>Shielding</b>		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
<b>Lumen Output</b>		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Battery Pack <sup>1</sup> with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>

Equation 2 2' x 2'



<b>Equation 2</b>	—	<b>FEQ2</b>
<b>Nominal Size: 2' x 2'</b>	—	<b>22</b>
<b>Shielding</b>		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
<b>Lumen Output</b>		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
Standard		
2500 Lumens	2500LH	
3000 Lumens	3000LH	
3500 Lumens	3500LH	
High Efficiency		
4000 Lumens	4000LH	
4500 Lumens	4500LH	
5000 Lumens	5000LH	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Battery Pack <sup>1</sup> with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>

Equation 2 2' x 4'




<b>Equation 2</b>	—	<b>FEQ2</b>
<b>Nominal Size: 2' x 4'</b>	—	<b>24</b>
<b>Shielding</b>		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
<b>Lumen Output</b>		
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
5500 Lumens	5500L	
Standard		
4000 Lumens	4000LH	
4500 Lumens	4500LH	
5000 Lumens	5000LH	
5500 Lumens	5500LH	
High Efficiency		
6000 Lumens	6000LH	
6500 Lumens	6500LH	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Battery Pack <sup>1</sup> with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>




# ARCHITECTURAL TROFFERS

Luna LED 2' x 2'

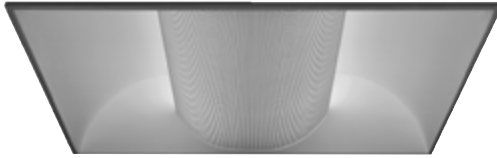

<b>Luna LED</b>	—	<b>FLUL</b>
<b>Nominal Size: 2' x 2'</b>	—	<b>22</b>
<b>Shielding: Perforated Shield</b>	—	<b>PS</b>
<b>Lumen Output</b>		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens (LD1 & L11 only)	4000L	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Battery <sup>1</sup>	EM	
Positional Clips	EQ	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>

Luna LED 2' x 4'

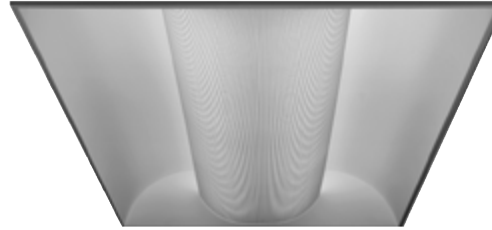

<b>Luna LED</b>	—	<b>FLUL</b>
<b>Nominal Size: 2' x 4'</b>	—	<b>24</b>
<b>Shielding: Perforated Shield</b>	—	<b>PS</b>
<b>Lumen Output</b>		
3000 Lumens*	3000L	
3500 Lumens*	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
5500 Lumens	5500L	
6000 Lumens*	6000L	
6500 Lumens*	6500L	
7000 Lumens* (*LD1 & L11 only)	7000L	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI <b>or</b> 90+ CRI	40K <b>or</b> 940K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Battery <sup>1</sup>	EM	
Positional Clips	EQ	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>